

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A



### CENTER

### LABORATORY

TECHNICAL REPORT

NO. 12680

TECHNICAL REPORT WRITING

# STYLE MANUAL



**OCT 1982** 

JAMES N. BOBLENZ, WITH ALICE A. CALHOUN US ARMY TANK-AUTOMOTIVE COMMAND

by ATTN: DRSTA-TS WARREN, MI 48090

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED

U.S. ARMY TANK-AUTOMOTIVE COMMAND RESEARCH AND DEVELOPMENT CENTER Warren, Michigan 48090

REPORT DOCUMENTATION F	PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
12680		
4. TITLE (and Subtitle) TACOM Tophnical Papart Writing Sty		5. TYPE OF REPORT & PERIOD COVERED
TACOM Technical Report Writing Sty	yle Manual	Special Publication
	ţ	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(e)		8. CONTRACT OR GRANT NUMBER(*)
James N. Boblenz and Alice A. Calhoun		
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Tank-Automotive Command R&D Center (DRSTA-TSE) Warren, MI 48090		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE
	1	Oct 1982
	1	13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(If different	t from Controlling Office)	15. SECURITY CLASS. (of this report)
	,	V 1 1511
	ļ	Unclassified
	1	15. DECLASSIFICATION/DOWNGRADING SCHEDULE
Approved for Public Release: D	Distribution Unli	imited
17. DISTRIBUTION STATEMENT (of the abetract entered in	In Block 20, If different from	an Report)
18. SUPPLEMENTARY NOTES		
<b>₩</b> ₹.		
19. KEY WORDS (Continue on reverse side if necessary and		
Technical report Gramm Technical writing Langu		Report organization
	ıage usage İng style	Editing Report production
Proofreading symbols	ng styre	report production
20. ABSTRACT (Continue on reverse side if recessary and	identify by block number)	
This style manual has been produce personnel in prepartation of scien have been designed to provide specwrite, edit, type and lay out copy to GPO printing requirements.	ed to assist auth ntific and techni cific instruction	ical reports. Guidelines ns to different groups who

#### SECURITY CLASSIFICATION OF THIS PAGE(When Date Entered)

This report consists of two main parts. Part I will be of interest to the author as it addresses standards of style, grammar, word usage, spelling aids, verbiage reduction tips and so on. Part II is of particular interest to production personnel as it describes and illustrates the mechanical aspects of report preparation in terms of format, treatment of tables and figures, pagination, numbering, cover format, organization, classification markings and proper referencing.

#### **PREFACE**

The authors wish to acknowledge the contributions of several people whose help made this report possible. Mr. George Taylor, TACOM's Technical Editor, who provided valuable assistance through initial editing. Mr. Alexander Kovnat, Senior Mechanical Engineer in the Technical Editors' Office for his constructive and timely comments. Finally, Mrs. Hannalore Foster, Ms. Roseann Romanski, and Mrs. Janet Grove, who did an excellent job in editing and programming the final version.

THIS PAGE LEFT BLANK INTENTIONALLY

#### TABLE OF CONTENTS

Section	Pa	age
1.0.	INTRODUCTION	11
2.0.	REPORT ORGANIZATION, PURPOSE, AND FORMAT	11
2.1.	Purpose of the Report	12
2.2.	Organization Requirements	12
2.2.1.	Front Cover	13
2.2.2.	Notices	13
2.2.3.	Report Documentation Page, DD Form 1473	13
2.2.4.	Summary	13
2.2.5	Preface	13
2.2.6.	Table of Contents	13
2.2.7.	Lists of Tables and Illustrations	13
2.2.8.	Introduction	13
2.2.9.	Statement of Objectives	15
2.2.10.	Conclusions	15
2.2.11.	Recommendations	15
2.2.12.	Discussion (The Main Text)	16
2.2.13.	List of Reference	16
2.2.14.	Bibliography	16
2.2.15.	Appendices	17
2.2.16.	Glossary of Terms	17
2.2.17.	List of Abbreviations, Acronyms, and Symbols	17
2.2.18.	Alphabetical Index	17
2.2.19.	Pistribution List	17
2.3.	Format Requirements	18
2.3.1.	General	18
2.3.2.	Page Size and Quality	18
2.3.3	Indentation, Margins, Vertical Spacing, and Numbering Paragraphs	18
2.3.4.	The Front Cover	20
2.3.5.	"Table of Contents" Page	22
2.3.6.	"List of Illustrations" Page	24
2.3.7.	"List of Tables" Page	24
2.3.8.	"List of References" Page	24
2.3.9.	"Selected Bibliography" Page	24
2.3.10.	"Distribution List" Page	25
2.3.11.	Tables	25
2.3.12.	Figures	27
2.3.13.	Headings	28
2.3.14.	Binding	30
2.3.15.	Numbers in the Text	30
2.3.16.	Pagination	31
3.0.	PUNCTUATION AND CAPITALIZATION	32
3.1.	General	32
3.2.	Punctuation	32
3.2.1.	Period	32
3.2.2.	Comma	33

#### TABLE OF CONTENTS (continued)

Section		Page
3.2.3.	Colon	. 34
3.2.4.	Bullets	-
3.2.5.	Parentheses and Brackets	
3.2.6.	Italics	_
3.2.7.	Hyphen	_
3.2.8.	Odds and Ends	_
3.3.	Capitalization	-
3.3.1.	General	_
3.3.2.	Capitalization of Headings	_
3.3.3.	Capitalization of Proper Names	-
3.3.4.	Capitalization of Abbreviations	• 30
4.0.	ABBREVIATING AND COMPOUNDING	
4.1.	Abbreviating	• 35
4.2.	Compounding	. 37
4.2.1.	General Rules	. 37
4.2.2.	Unit Modifiers	
4.2.3.	Technical Terms	
4.2.4.	Numeric Compounds	
4.2.5.	Fractional Numeric Compounds	
4.2.6.	Capital Letter Words	
4.2.7.	Improvised Words	
5.0.	SPELLING	41
5.1.		
5.2.	Spelling Called for by Government Printing Office Style Manual Words Easily Misspelled	-
-		
5.2.1.	Double Consonants	-
5.2.2.	Endings "cede", "ceed", "sede"	
6.0.	READABILITY	-
6.1.	Standards (DARCOM Cir 310-9)	
6.2.	Word Choice	
6.2.1.	Using Simple Language	
6.2.2.	Avoiding Word Confusion Errors	
6.2.3.	Overworked Words and Phrases to be Avoided in Writing	
6.3.	Sentence Structure and Grammar	
6.3.1.	Tense	
6.3.2.	Voice	
6.3.3.	Parallel Elements	
6.3.4.	Emphasis	. 46
6.3.5.	Wordiness	
7.0	DOCUMENTATION	. 47
7.1	Using Footnotes	
7.1.1.	In the Text	
7.1.2.	In Tables	_
•		
7.2.	Preparing the "List of References"	
7.3.	Including a Bibliography	
7.4.	Including an Index	. 48
8.0.	EDITING	. 48

#### TABLE OF CONTENTS (continued)

Section			1	Page
8.1.	Relationship between Editor and Writer			48
8.2.	Relationship between Editor and Typist			49
8.3.	Proofreading Symbols			
	List of References			51
	Selected Bibliography		•	53
	APPENDIX A. MODEL REPORT			A-1
	APPENDIX B. GUIDELINES FOR WRITING TECHNICAL DEFINITIONS			
	APPENDIX C. GUIDELINES FOR WRITING TECHNICAL DESCRIPTIONS (	OF		
	OBJECTS			C-1

THIS PAGE LEFT BLANK INTENTIONALLY

#### LIST OF ILLUSTRATIONS

Figur	e Title Pag	е
2-1.	Model "Notices" Page	0
2-2.	Manuscript Guidelines	5
2-3.	Blank Front Cover	7
2-4.	Model Covers	
2 <b>-</b> 5.	Model Cover for Contractor-Prepared Report Submitted in Final Form with a Report Number	9
2-6.	Model Cover for Report Co-Authored by Contractor and TACOM Engineer(s) 1	9
2-7.	Model Cover for Report Prepared by TACOM Engineer(s)	9

THIS PAGE LEFT BLANK INTENTIONALLY

#### 1.0. INTRODUCTION

This manual, prepared by the Technical Editor's Office as a Style guide for US Army Tank-Automotive Command (TACOM) Research and Development technical report writers, is designed to make the operation of the Technical Editor's Office more efficient, thereby increasing its productivity. One of the jobs of the Office is to make sure that technical reports clearly convey and effectively document the objectives, conclusions, recommendations, materials, and methodology of engineering projects. Currently, a number of government documents offer advice on the preparation of technical reports, yet each varies in some way from the others. Believing that standardizing format would simplify the reporting process, the Office published a style manual in May of 1981 and revised that edition in June of the same year. Nevertheless, reports have continued to reveal variations in format and mechanics. As a result, the Office still spends as much time standardizing such variations as it does in clarifying the logical statement of ideas. To minimize the occurrence of such variations, the Office has prepared a style manual which offers additional guidance for technical report writers on the following:

- o overall organization, purpose, and format;
- o punctuation and capitalization;
- o abbreviating and compounding;
- o spelling and word choice; and
- o documentation.

#### 2.0. REPORT PURPOSE, ORGANIZATION, AND FORMAT

#### 2.1. Purpose of the Report

In composing a technical report, the engineer must keep in mind that his major goal is to provide managerial personnel with the amount and type of information needed to effectively evaluate his project. To do this, the engineer must understand the characteristics of the manager.

First, although most managers are very interested in all engineering projects and would like to spend a good deal of time thoroughly studying the details of each report, they are so over-burdened by administrative duties that they cannot possibly do this. The typical manager will carefully read the introduction, the statement of objectives, the conclusions, and the recommendations but will usually only skim the rest of the report. Thus, the reporting engineer, when writing a report, should make sure that all of his major points are clearly and concisely spelled out in the opening sections.

Secondly, the engineer must be aware of the educational level and experience of his managerial audience. He can, of course, expect his readers to

be highly literate and to have a substantial knowledge of engineering methods and materials, especially those directly related to TACOM's mission. However, he cannot expect managers to have highly specialized knowledge of specific engineering fields or of complex mathematics. He will, then, want to make sure that new terminology, complicated procedures, or innovative techniques are clearly defined.

Thirdly, the engineer must be aware of the special goal orientation of managers. While they are certainly interested in immediate or short-range effects of separate R&D projects, their primary orientation is toward long-range effects and their concern is with the effective integration of all TACOM projects within their divisions. Therefore, in providing background, in stating goals and results, and in offering suggestions for improvements, the engineer must show what his particular project contributes to the overall mission of the US Army Tank-Automotive Command. Finally, although the average manager will not be able to study the details as thoroughly as he would like, the writer must be careful to accurately and thoroughly document the materials and methods of his project. On occasion, the manager may be asked to justify his recommendations. He should be able to find all the details he needs in the main text of the report.

In sum, the engineer must provide the managers with the quantity and quality of information that they need to make decisions regarding future projects. Understanding the overall purpose of the technical report, the engineer must then begin to focus on the specific purpose of each section. (The sections that are not discussed in detail here need no explanation.)

#### 2.2. Organization Requirements

Although all reports do not necessarily contain all of the following elements, those that are used will appear in the following order with the abstract appearing only on the Report Documentation Page, DD Form 1473.

#### Front Matter

- o Front Cover (Required)
- o Notices
- o Report Documentation Page, DD Form 1473 (Required)
- o Summary
- o Preface
- o Table of Contents
- o List of Illustrations
- o List of Tables

#### Body of the Report

- o Introduction
- o Objectives
- o Conclusions
- o Recommendations
- o Discussion (Main Text)

Reference Material

- o List of References
- o Bibliography
- o Appendices
- o Glossary of Terms
- o List of Abbreviations, Acronyms, and Symbols
- o Alphabetical Index (Recommended for Long Reports)
- o Distribution List
- o Back Cover
- 2.2.1. Front Cover. The cover page requires little effort on the author's part. The Technical Editorial Office has standard "prepared" front covers that are to be used on all TACOM Technical Reports. Instructions for cover preparation are at para 2.3.4.
- 2.2.2. Notices. Notices concerning Department of Army position on the report, indorsement of products and companies mentioned in the report, and uses of the report when it is no longer needed are placed on a separate unnumbered right-hand page before page 1, DD Form 1473 (See Figure 2-1 and para. 2.3.16.2).
- 2.2.3. Report Documentation Page, DD Form 1473. The Report Documentation Page serves as the title page in DOD reports and is page one in every report. This form, including detailed instructions for its completion, should be picked up by the TACOM project engineer from the Technical Editor's Office and completed before the report is sent to the printing office. Although the instructions are quite thorough, two additional points should be noted. First, Block 11 should always include the name and office symbol of the TACOM project engineer. Secondly, additional guidance in choosing the "Key Words" asked for in Block 19 can be found in a draft of a Manufacturing Methods and Technology (MMT) guide on file in the Technical Editor's Office.
- 2.2.4. Summary. A summary may be included to provide a digest of the report, to explain the reason for the intiation of the work, and to outline principal conclusions and recommendations. A summary may be used to give more information on the content of the report than can be presented in the abstract entered on the Report Documentation Page, DD Form 1473.
- 2.2.5. Preface. If a preface is used, it may show the relation of the work reported on to associated efforts, give credit for the use of copyrighted material, or acknowledge significant assistance received.
- 2.2.6. Table of Contents. The purpose of the Table of Contents is to provide a quick overview of and ready access to report sections. As such, the Table of Contents should list the numbered report headings of each section and the page number on which that section begins. Format guidelines are provided in para 2.3.3.
- 2.2.7. Lists of Illustrations and Tables. Like the Table of Contents, these lists provide quick overviews of and guides to figures and tables. If each list is shorter than one half page, they may be typed on the same page. Format guidelines are found in paras 2.3.6. and 2.3.7.

#### NOTICES

This report is not to be construed as an official Department of the Army position.

Mention of any trade names or manufacturers in this report shall not be construed as an official indorsement or approval of such products or companies by the US Government.

Destroy this report when it is no longer needed. Do not return it to the originator.

Figure 2-1. Model "Notices" Page.

- 2.2.8. Introduction. The Introduction of a technical report provides management with the background, scope, and purpose of a particular engineering project and, where possible, relates the specific objectives of the project to overall divisional objectives or to the TACOM mission. Always written in present tense, it can, nevertheless, be written either as a single paragraph or as a series of numbered paragraphs: the decision should be based on the complexity of the material. In writing a single paragraph introduction, the technical report writer may wish to use the introductory paragraph of the sample report (see APPENDIX A) as a model. Examples of other introductions are on file in the Technical Editor's Office. In studying these introductions, the writer should note that the first sentence includes the following:
  - o the name of the contractor (if the project is not in-house),
  - o the Department of Army contract number, and
  - o a summary of the project purpose.

The first two items given above are omitted from the introduction and included in the preface of a long report, along with details regarding contributions of individual engineers or private sub contractors. Additional sentences in the introduction provide—in as few words as possible—information on (1) the problem(s) the project has sought to solve, (2) the methods and materials used to alleviate the problems, and (3) the results of these efforts. In providing such information, the engineer may wish to include a few brief (no more than one—sentence) definitions of terminology concerning the object of experimen—tation (such as track system) or methods used (such as blow-molding or laser treatment). Instructions on writing definitions are given in APPENDIX B. He may also wish to offer concise analysis of the advantages of the current process or product.

- 2.2.9. Statement of Objectives. The purpose of the "objectives" paragraph is to describe the results that were intended (but not necessarily achieved) by those involved in the effort which the report addresses. In this section, the author delineates the hoped-for accomplishments, even if the actual outcome of the work fell short of these expectations. The manner in which the engineer states these objectives is dependent upon their complexity. If, for example, he can state the objective(s) in a sentence of twenty-five words or fewer, he may do so. (See "Objective," p. A-8.) On the other hand, in a case involving several complex objectives of this project where [the following: is used then list them as "bulleted" parallel independent clauses. The words the following are not needed when the bulleted items are dependent clauses. Such clauses should be parallel in structure (See para 6.3.3.).
- 2.2.10. Conclusions. Conclusions summarize the success achieved or, in any instance, the knowledge gained as a result of the work described in the report. If at all possible, the statement of the conclusions should parallel content of the objectives.

- 2.2.11. Recommendations. Extremely important information, the recommendations allow the engineer to convey to managerial personnel the steps that can be taken to insure future success. Recommendations could also include advice on follow-on research projects related to divisional objectives or overall Command mission.
- 2.2.12. Discussion (The Main Text). As the bulk of the report, the section titled "Discussion" is of great importance in substantiating the assertions made in the Introduction, Objective(s), Conclusions, and Recommendations. The engineer should, therefore, spare no effort in providing a detailed record of materials, tools, and methods involved in his project. He may organize and develop the content of the body in any manner he wishes. General headings he may consider are the following:
  - o Materials
  - o Design
  - o Fabrication
  - o Testing
  - o Theoretical Formulation
  - o Packaging

Not only should he provide a narrative summary of the various stages of research and development, but he should also provide as many tables and figures as he needs to clarify and illustrate points made in the text. It is important for him to note that photographs or drawings are meant to be visual counterparts of verbal descriptions in the text; they are not substitutes for text.

The same principle applies to graphs and tables. All the major points that these figures, graphs and tables illustrate should be part of detailed discussion in the text. In addition, major types of information presented in a table or graph and viewpoints to be discerned should be explicitly stated at the point in the text where the table is first mentioned. Finally, each table and figure should be placed on a separate page as close as possible to the point in the main text where it is first mentioned. (See paras 2.3.10. and 2.3.11. for further guidance on tables and figures).

- 2.2.13. List of References. When it is necessary to cite references, identify the source to aid future readers. The references should be listed in the same numeric order as cited in the text, and in a reference list, which follows the body of the report. (See para 7.2)
- 2.2.14. Biblography. The bibliography, if included, is a selected list or sources of information which were consulted but not quoted in the text. (See para 7.13)

- 2.2.15. Appendices. Appendices include material that is parenthetical or supplementary to the main text. In other words, material may be placed in an appendix if its inclusion in a text would disrupt the normal flow of ideas due to the amount of detail required or because it is only peripherally related to the discussion. Occasionally, related reports or studies—parts of which have been cited in the text—are included in appendices. John M. Lannon in <u>Technical Writing</u> gives the following list of possible items to be included as appendices (1).
  - o details of an experiement
  - o statistical or other measurement
  - o maps
  - o complex formulas
  - o long quotes (one or more pages)
  - o texts of laws, regulations, etc.
  - o related correspondence (letters of inquiry, etc.)
  - o interview questions and responses
  - o sample questionnaires and tabulated responses
  - o sample tests and tabulated results
- 2.2.16. Glossary of Terms. Unusual terms should be described, either in the text or as parenthetical notes, when first used in the body of the report. When many such terms are used, list them in alphabetical order and with appropriate definition in a glossary.
- 2.2.17. List of Abbreviations, Acronyms, and Symbols. Define abbreviations, acronyms, and symbols when first used in the report. If they are numerous, list them in alphabetical order and with appropriate definitions on a separate page at the end of the report.
- 2.2.18. Alphabetical Index. For long reports, an alphabetical index is recommended. It should be as complete as the nature of the report and its probable use requires.
- 2.2.19. Distribution List. A distribution list must be included as the last page(s) of each technical report. As a minimum, the following addresses must be included on the list.


Defense Technical Information Center Cameron Station Alexandria, Virginia 22314 Commander
US Army TACOM
ATTN: DRSTA-TS (Technical Library)

Warren, MI 48090

If the report has limited distribution, two copies should be sent to the first address; if the distribution is unlimited, fifteen copies are to be mailed to that address. Regardless of distribution limitations, two copies are to be sent to the second address. An extended listing of optional distribution points and their addresses is on file at the Technical Editor's Office and may be referred to at any time.


#### 2.3. Format Requirements

- 2.3.1. General. The Technical Editors' Office has adopted a standard format so that Office publications will be of a uniform quality. These formal requirements are based on the criteria explained in AR 70-31, in MIL-STD-847A, and in the Government Printing Office (GPO) Style Manual. Departures from these guidelines have been made to make the reporting process more efficient.
- 2.3.2. Page Size and Quality. All report pages, including illustrations and tables, should be typed on  $8-\frac{1}{2}$  by l1-inches white paper. Because of expenses incurred in printing, foldout pages should be avoided, if at all possible.
- 2.3.3. Indentation, Margins, Vertical Spacing, and Numbering Paragraphs.
- 2.3.3.1. Indentation. Block style should be used throughout the majority of the report: with the exception of "bulleted" items (see para 3.2.4.) and general explanatory material, all headings in the body and lines of copy sould be flush left and numbered.
- 2.3.3.2. Margins. (Figure 2-2). The following guidelines on margins should be adhered to. The margin at the top of the page should be no narrower than  $1-\frac{1}{2}$  inches. The margin at the bottom of the page should be no narrower than 1 inch. (Please note that the page number is considered as part of the copy, that there is that a  $\frac{1}{2}$ -inch space between the text and the page number, and there must thus be a full 1-inch margin below the number. Gutter margins (the inner margins between facing pages) should be at least  $1-\frac{1}{2}$  inches wide, and outer margins should be at least 1-inch wide. If copy cannot be printed on both sides of the page, left margins should be at least  $1-\frac{1}{2}$  inches wide, and right margins should be at least 1 inch wide.
- 2.3.3.3. Vertical spacing. Vertical spacing involves spacing within a single section of text and spacing between sections. As a general rule, the text of technical reports is to be single-spaced. One exception is seen with "bulleted" items (see para 3.2.4. and pp. 6, 7, 8, 9, etc. of this document); there is usually a blank line between the text and the first bulleted point and a blank line separating each point. Another exception involves spacing between headings in the text. The first major heading in the body is preceded by a  $1-\frac{1}{2}$  inch margin and is followed by two blank lines. All other major headings in the main text are both preceded and followed by two blank lines. Secondary headings are

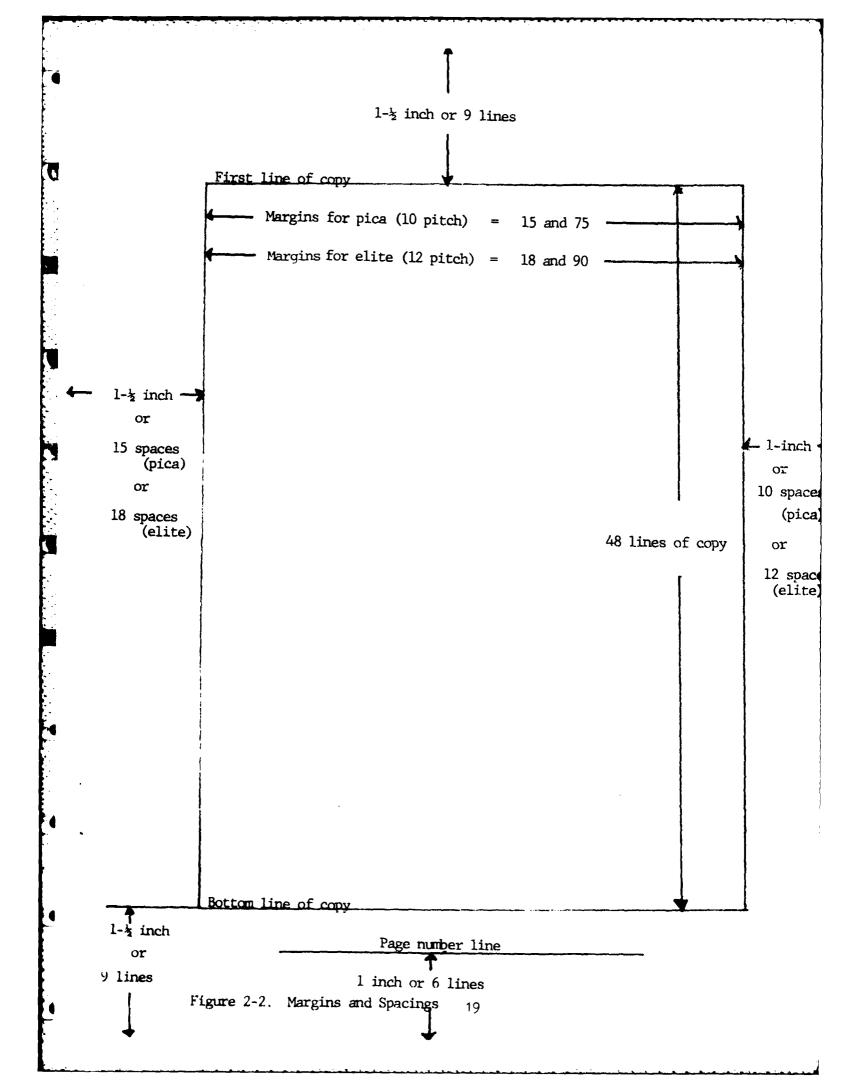

separated from other secondary headings by one blank line. All lower level of headings are separated from one another by one blank line. A third exception concerns the placement of centered headings on the cover sheets or appendices and addenda. The word appendix or addendum is typed at least 2-½ inches from the top of the page. On the fourth line below this heading is the title of the section. If the title runs more than one line, it is doublespaced. As a general guide this material is usually horizontally and vertically centered in the top two-thirds of the page. Finally, the writer must be aware that each of the following sections always begins on a right-hand page: Front matter--all sections (with the occasional exception of the List of Tables which begins on the same page as the List of Illustrations when each list is less than ½-page long); Body of the Report--the Introduction; Reference Material -- all items.

- 2.3.3.4. Numbering paragraphs. As a general rule, all paragraphs in technical reports are headed and numbered. This procedure provides abbreviated reference terms for entire sections of text. Thus, material that is frequently referenced—a government specification, for example—is readily accessible. However, a report occasionally includes background, or introductory material that is of such a general nature that it need not be presented as a series of numbered paragraphs. Usually such material is preceded by appropriate heading numbers and the heading General. The first line of the first paragraph directly follows the heading. All further paragraphs are indented five spaces. (See para 2.1.) By and large, paragraphs in such sections should be no longer than 150 words.
- 2.3.4. The Front Cover. The general format for all TACOM technical reports is illustrated in Figure 2-3. Such blank "working covers" may be picked up from the Technical Editor's Office. The project engineer then fills in the following items.
- 2.3.4.1. Defense Technical Information Center (DTIC) control number. The rectangle in the upper right-hand corner should be left blank for the accession number assigned at the Defense Technical Information Center in Alexandria, Virginia.
- 2.3.4.2. The report number. Before it is edited, each report is assigned a report number and recorded on a log in the Technical Editor's Office. When the report is sent in final form to the printing office, this report number is placed on the blank line following the heading which reads R and D Center Laboratory Technical Report.
- 2.3.4.3. The report title. The title is separated from the report number by several blank lines. All letters in a title are capitalized, and the title is centered. If the title runs more than one line, the second line should be centered under the first line as seen in Figure 2-4. In choosing words for the title, the writer should be careful to use the same technical terminology in his or her title that is used by the Army in their project contract title. However, whenever possible, the engineer is advised to use widely known terms in the title so that the report can be readily accessible through systems which index by key terms. Also, the report title should always be unclassified, if possible; even in a classified report.

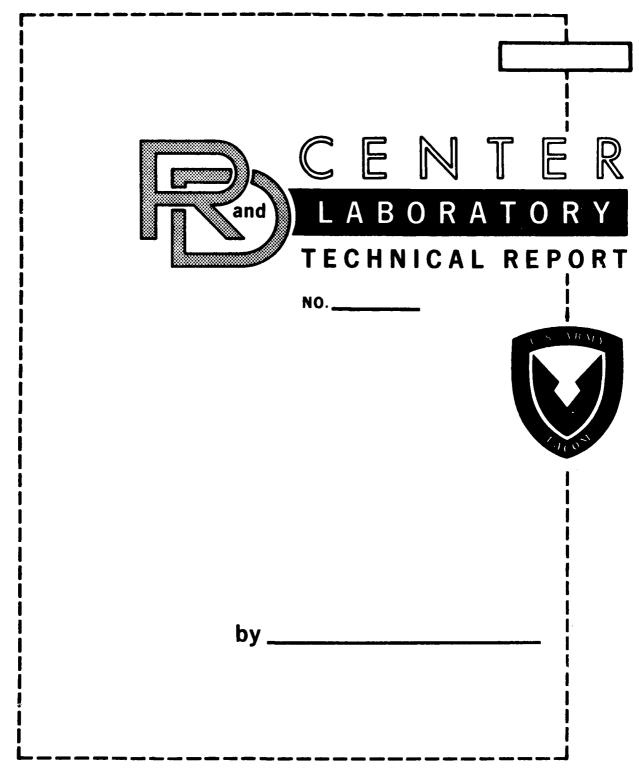

## U.S. ARMY TANK-AUTOMOTIVE COMMAND RESEARCH AND DEVELOPMENT CENTER Warren, Michigan 48090

Figure 2-3. Sample Blank Front Cover

- 2.3.4.4. The contract number. If used, the Department of Army contract number is separated from the title by several blank lines.
- 2.3.4.5. The report date. The month and year that the technical report was completed are centered beneath the contract number. This date should be the same as the date in Block 12 on the Report Documentation Page, DD Form 1473. Block 5 of DD Form 1473 gives the dates that the project itself was begun and completed.
- 2.3.4.6. Author credit line. Author credits are printed in the space above the "by" line. Figures 2-4 through 2-7 illustrate the credit lines for the four types of reports submitted to the Technical Editor's Office: the contractor-prepared report submitted without a report number in draft form to a TACOM engineer (Figure 2-4), the contractor-prepared report submitted with a report number in final form to the TACOM engineer (Figure 2-5), the report co-authored by a contractor and a TACOM engineer (Figure 2-6), and the report prepared by a TACOM engineer (Figure 2-7).
- 2.3.4.7. Distribution statement. Limitations concerning distribution are indicated several spaces below and to the left of the author credit lines (see Figure 2-7). An extended discussion of distribution statement may be found in DOD Directive 5200.20.
- 2.3.5. "Table of Contents" Page (See Tables of Contents on pp. 3-4 and p. A-4).
- 2.3.5.1. General. In formatting the Table of Contents page, the writer must pay close attention to placement, numbering, and capitalization of headings and to placement of page numbers.
- 2.3.5.2. Placement of titles. The writer should note that the first printed line on the page begins  $1-\frac{1}{2}$  inches from the top and contains the centered title in all capitals. The title is followed by two blank lines. On the third line below the title, flush with the left margin, should appear the word section, of which only the first letter is capitalized. On the same line, flush with the right margin is the work page; here, as well, only the first letter is capitalized.
- 2.3.5.3. Choice of headings. Leaving one blank line after the "Section/Page" line, the writer then begins a flush-left listing of report headings. Since it is not necessary to include front matter in the table, the list begins with body headings. They are listed with the same numbers and in the same form as they are listed in the text. (See para 2.3.9.). With a short report, only major headings need to be listed. In longer reports, tertiary headings may be included. Fourth-level headings are not included. Only rarely will headings below this level be incorporated in the table. The table also cites the list of references, appendices with corresponding titles (e.g., APPPENDIX A: MODEL REPORT), distribution list, and other back matter.
- 2.3.5.4. Vertical spacing of headings. Major headings are separated from other headings by one blank line. Secondary and tertiary headings follow one another directly.

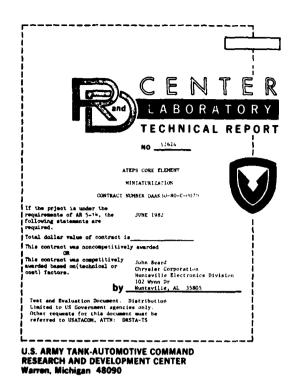


Figure 2-4. Sample Cover for Contractor Prepared Report.

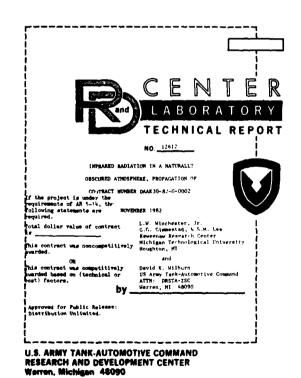


Figure 2-6. Sample Cover for Combined Contractor and TACOM Prepared Report.


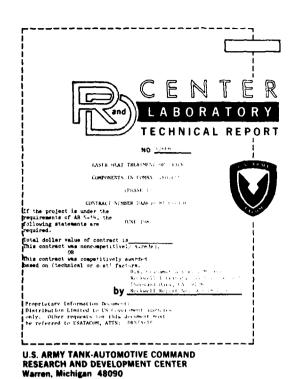


Figure 2-5. Sample Cover for Contractor Authored Report with Contractor's Report Number Assigned.

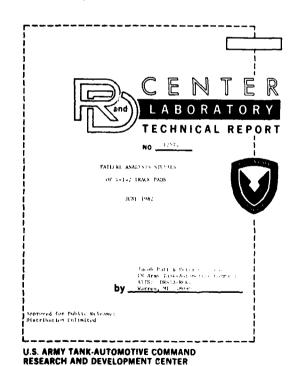

Warren, Michigan 48090

ه العالم معالم ما ها معالم عالم المرابع المسلم العالم ال<u>مرابع المرابع المرابع المرابع الم</u>الم المرابع العالم الم

Figure 2-7. Sample Cover for an `-House Prepared Report.

- 2.3.5.5. Horizontal spacing of table items. With numbered headings, the space between the period after the last number and the words of the headings depends on the levels of headings included in the table. When only major and secondary headings are included, two spaces separate the number and the first word of each heading. When three levels are included, four spaces separate the numbers and first words of major and secondary headings and two spaces separate the numbers and first words of tertiary headings. In all cases, the first letter of all headings are vertically alined. The last word of each heading is separated from the page number on which the section begins by spaced periods. These periods stop at the space preceding the space under the p in the word page. (See the Tables of Contents of this manual.)
- 2.3.5.6. Page numbers. Page numbers are listed flush right.
- 2.3.6. "List of Illustrations" Page. The title for this page is centered 1-½ inches from the top and is typed in all capitals. On the third line below the title, flush with the left margin is the capitalized word figure. In the center of the line is the capitalized word title. On the same line, flush right, is the capitalized word page. Beginning on the second line below the word figure are the figure numbers. Each figure is given two numbers separated by a hyphen and followed by a period: the first is the number of the major section in which it occurs. The second is based on the order on the figure within the section and is recorded in Arabic numerals, (e.g., the fourth figure in the second section would be numbered 2-4.) The figure title is separated from the number by at least two blank spaces. (All titles should, however, be alined.) Titles are separated from their correspondent flush-right page numbers by spaced periods.
- 2.3.7. "List of Tables" Page. If the Lists of Illustrations and Tables are each less than one page, they may be placed on the same page. With the obvious difference of title, the format of the "List of Tables" page is identical to that of the "List of Illustrations" page with one exception: the capitalized word table is written over the listing of table numbers.
- 2.3.8. "List of References" Page. The title of this page appears in all capitals 1-½ inches below the top of the page. The list of references begins on the third line below the title. Referenced items are preceded by Arabic numerals in ascending sequence. These numerals are enclosed in parentheses and are separated from the publication information by two blank spaces. Each citation is single-spaced, and one blank space is left between citations. The page number continues the consecutive pagination of the body. (See para 7.2 for specific information on documentation forms of individual items.)
- 2.3.9. "Selected Bibliography" Page. Like the list of References page, the title of this page appears in all capitals  $l-\frac{1}{2}$  inches below the top of the page. The list of references begins on the third line below the title. Referenced items are listed alphabetically by the author's last name. When the author's name is not available, the title of the work is listed first (or, as in the case of an Army regulation or military standards or specifications, the acronym and number are first), in the same alphabetical sequence. Each entry is single spaced. The second and all subsequent lines of each entry are indented five spaces. One blank space is left open between entries. The page number continues the consecutive pagination of the body. (See para 7.3 for specific information).

2.3.10. "Distribution List" Page. The format for the distribution list page is similar to that of the Table of Contents and Lists of Tables and Figures. The centered heading—"Distribution List"—is typed in all caps l-½ inches from the top of the page. On the third line below the title, flush with the right margin, is printed the word copies of which the first letter is capitalized. On the fifth line below the title, flush with the left margin, begins a listing of the addresses to which the report is to be sent. The addresses themselves are single-spaced while there is a blank space between each complete address. Directly across from the first line of each address, flush with the right margin, is printed the number of copies to be mailed to that address. The page numbers of the list begin a new series of ascending Arabic Numerals preceded by the Distribution; e.g., page one has centered at the bottom Distribution-1, page two has Distribution-2, et cetera.

#### 2.3.11. Tables.

- 2.3.11.1. General. Each table included in the body text of a report should be adequately introduced. Such references should summarize the contents of the table, clarify the relationship among the table elements, and explain the perspectives to be discerned. A table is meant to clarify highly detailed text information through its format. However, a table should always be accompanied by thorough text analysis.
- 2.3.11.2. Placement of tables in the text. For the most part, each table is to be placed on a separate page of text as close to the point at which it is first mentioned as is possible. In other words, unless the table is extremely short, it is not to be run in with the narrative. Occasionally, two short tables referenced on the same page of text may be put on a single page immediately following the text reference. (See p. A-13 of Model Report in APPENDIX A.) However, in no case are tables that are referenced in the text to be grouped together as an appendix. Additionally, tables should be restricted to a single page if possible. If the table material cannot fit on a single page, two solutions are acceptable. Preferably, the table copy will be photographically reduced so that it will fit on a single page. If the table must run more than one page, the table heading followed by the capitalized word continued in parentheses, the table title, and the table column headings must be repeated at the top of each additional page of the table.
- 2.3.11.3. Placement on page. Unless it is not possible to do so and maintain readability, place tables so that they may be viewed without turning the page side ways. If this is not possible, place each table sideways so that it can be seen by rotating the page clockwise.
- 2.3.11.4. Table heading and title. The table heading and title begin at the left margin on a line that is  $1-\frac{1}{2}$  inches from the top of the page. The word table, the first letter of the first word in the title, and the first letter of all other important words in the title are capitalized. All letters in the word table are followed by a two-part Arabic numeral separated by a hyphen, the first part being the number of the section in which the table appears and the second

part a number indicating the order of the table within the section. For example, the second table in section five of a report would have this heading—Table 5-2. The heading is followed by a period and is separated from the table title by two blank spaces. The title should be completed on one line if at all possible. If additional lines are necessary, they should be flush with the first letter of the first word in the title.

- 2.3.11.5. Related tables. Tables that present similar information should use similar formats.
- 2.3.11.6. Use of unbroken vertical and horizontal lines. Unbroken vertical lines should not be used either as margin-borders or as dividing lines between table columns. Unbroken horizontal lines, however, may be used in tables. Double horizontal lines are frequently used to enclose the actual table material; that is, they are used, (1) between the table heading/title and the column titles (or top-heads) and (2) between the table data columns and the footnotes (See p. A-13). A single unbroken horizontal line separates column titles and the data columns themselves.
- 2.3.11.7. Column top-heads. Column top-heads are separated from the double horizontal lines above them by one blank line-space and from the single horizontal line below them by one blank line-space. Unless it is impossible, each top-head is stated as a single word, of which only the first letter is capitalized. When the top-head is composed of several words, only the important words are capitalized. Further, when both single-line and multiline top-heads occur in the same table, the single-line top-heads are alined with the second lines of the multiline heads.
- 2.3.11.8. Column/heading alinement. If the top heading is wider than the column, the column material is centered beneath it, if the column material is wider, the top-heading is centered above it.
- 2.3.11.9. Column data alinement. In all cases where decimals appear in column data, the decimals are alined. Numbers without decimals are right-justified so the last digits of all numbers aline vertically.
- 2.3.11.10. Table footnotes. Table footnotes are placed below the double horizontal line following the table data. To avoid confusion with table numerals (especially in table material involving exponents), the GPO Style Manual recommends the use of asterisks, daggers, etc. or superior letters.(3) The order of symbols should be as follows: asterisk (\*), dagger (†), double dagger (††), section mark (3), and parallel (//).(3) If such symbols are difficult to reproduce superior letter may be used. The symbol or letter is flush-left, and the footnote material follows it directly.
- 2.3.11.11. Pagination. Table page numbers continue the sequential pagination of the text. The page number is placed on a line that is 1 inch from the bottom of the page.

#### 2.3.12. Figures.

- 2.3.12.1. General. Each figure (or illustration) should be thoroughly explained in the main text. If the figure is a graph or chart, the reader should be given a thorough analysis of the relationship among the elements shown on the figure. Never should one rely on so vague a statement as "Results of these tests are shown in Figure 3-4." If the figure is a photograph or line drawing, the writer should provide equivalent verbal description in the text. Appendix C provides instructions in writing technical descriptions.
- 2.3.12.2. Placement of figures in the text. Each figure is to be placed on a separate page of text as close to the point at which it is first mentioned as is possible. In no case are figures that are referenced in the text to be grouped as an appendix. It is, however, acceptable to give two views of a single object (from different angles, from different distances, etc.) on the same page. When such is the case, they are labeled (a) and (b), and each letter is followed by a brief title explaining the view. All important words are capitalized in these titles.
- 2.3.12.3. Placement of figures on the page. Like tables (see para 2.3.11.3), most figures should be placed so that they can be read without turning the page sideways. If the figure must be placed sideways, it should be placed so that it is read by turning the page clockwise.
- 2.3.12.4. Figure heading and title. The figure heading and title begin at the left margin at least two lines below the figure. The word figure, the first letter of the first word in the title, and the first letter of all other important words in the title are capitalized. The word figure is followed by a two-part Arabic Numeral separated by a hyphen, the first part being the number of the section in which the figure appears and the second part a number indicating the order of the table within the section. For example, the third figure in section one would be designated as Figure 1-3. This heading is followed by a period and is separated from the figure title by two spaces. The title should be completed on one line if possible. If additional lines are required, they should be flush with the first letter of the first word in the title.
- 2.3.12.5. Related figures. Figures that present similar information should use similar formats.
- 2.3.12.6. Legends. With the exception of self-explanatory photographs or drawings, many illustrations are accompanied by descriptive legends. Here the term legend differs slightly from the way it is used in MIL-STD-847A. That document uses the word legend in the sense that the word title has been used here. In this document, legend refers to a brief list explaining the various symbols or colors used on a chart or graph. The explanatory material can be placed in a blank space on the figure itself or it can be placed in a space below the actual figure and above the figure title. But legends should never be placed within blank areas on a drawing, they are to be set off to the side or below.
- 2.3.12.7. Callouts. So far as practical, place callouts horizontally, unboxed, and near the item called out. Make callouts consistent in size and type face throughout a report. Use lettering of at least 8-point or in a final reproduced size.

- 2.3.12.8. Foldouts. Foldouts are expensive to reproduce and should be avoided, if possible.
- 2.3.12.9. Use of photographs, diagrams, and drawings. Photographs, diagrams, and drawings are extremely important in technical reports in that they serve as visual equivalents of verbal descriptions. However, each has its own special merit according to Theodore A. Sherman and Simon S. Johnson, authors of the third edition of Modern Technical Writing.(3) These authors suggest that photographs are best used to substantiate the truth. If, for example, a fuel tank has distorted in field testing, a photograph can provide visual proof of this. However, photographs are limited as illustrations in that they can only show surface views. Drawings, on the other hand, can delineate surface and interior views simultaneously. They also, according to Sherman and Johnson, "make it possible to omit what is not significant and to emphasize what is important."
- 2.3.12.10. Quality of photographs and drawings. Photographs should be good quality black and white, medium contrast, and reproducible at Army print plants. Line drawings shall contain no unbroken lines. Sufficient weight of lines should be used to prevent deterioration of line quality should the drawing be reduced in size. Shading is not recommended. Further information can be found in MIL-M-38784A and AR 310-3.
- 2.3.12.11. Use of color. Avoid the use of color if at all possible; a good quality black and white will serve in nearly all photo requirements. Color prints cost more to print due to the number of passes through the press to produce the "color" image. It is also difficult to get true register marks alined in the press so there is little change of colors bleeding on to each other. Finally, color images rarely produce the desired effect in the final document.

#### 2.3.13. Headings.

- 2.3.13.1. General. The same rules apply to subdivisions of headings as apply in outlining: there must be at least two subheadings at any given level. Specific rules governing heading format vary according to report section and heading level. The writer must thus pay close attention to placement, numbering, horizontal and vertical spacing, capitalization, and punctuation.
- 2.3.13.2. The "General" heading. The capitalized word *General* is used before introductory material at the third and fourth levels when ensuing paragraphs are numbered.
- 2.3.13.3. General guidlines on unnumbered headings. Headings for the following sections are centered 1-inch below the top of the page in all caps: Notices; Summary; Preface; Table of Contents; List of Illustrations; List of Tables (unless it appears on the same page ad the List of Illustrations); List of References; Bibliography; Glossary of Terms; List of Abbreviations; Acronymns; and Symbols; Index; and Distribution List. The appendices have separate cover sheets. The numbered appendix heading (for example, APPENDIX A) is printed in

- all capitals  $2-\frac{1}{2}$  inches below the top of the page. This heading is separated from the centered title of the appendix (also in all capitals) by several blank spaces If this title runs more than one line, the additional lines are centered under the first.
- 2.3.13.4. General guidelines on numbered headings. Headings in the body of a report are preceded by a minimum of two Arabic numerals—the major section number and a zero, if there are no subheadings. For example, the heading of the first section in the body would be stated as para 1.0. The only other section of a report which has numerals preceding the heading is an appendix. Here the letter of the appendix precedes the numerals. For example the heading for the first secondary heading in the second section of an APPENDIX A would read as follows: A-2.1. The heading on the cover sheet of the appendix is not numbered.
- 2.3.13.5. Major headings in body. The following principles govern the formatting of major headings (also called first-level headings or primary headings). The statement of each major heading begins at the left margin with an arabic numeral denoting the section number and followed by a period, a zero, a second period. Two blank spaces separate the heading number and the heading words. All letters in major headings are capitalized. The heading should not be underlined; nor should it be followed by a period. Any text that follows a major heading begins at the left margin after one blank line-space. All major headings except the first are preceded by two blank line-spaces. The first is preceded by 1-½ inches of white space.
- 2.3.13.6. Secondary headings in body. The following guidelines apply to all secondary headings. Like major headings, secondary headings begin at the left margin with an Arabic numeral denoting the section number and followed by a period, with secondary headings, though, this period is followed by a specific subdivision number, and a second point. The first secondary heading in section one would thus begin with the following: 1.1. Two blank spaces separate the heading's number and the heading words. Unlike the major heading, only the first letters of important words are capitalized here and the entire word group is underlined. The heading is not followed by a period. Any text that follows a secondary heading begins at the left margin after one blank line-space. One blank line-space appears between a secondary heading and a preceding primary heading and between a secondary heading or another secondary heading.
- 2.3.13.7. Tertiary headings in body. The following guidelines govern the presentation of tertiary (or third-level) headings in technical reports. The statement of the tertiary heading begins at the left margin with the appropriate arabic numerals of the major and secondary section of which it is a part. Each of these is of course followed by a period. After the second period, the writer states a third arabic numeral—the number of the third-level subdivision. It, too, is followed by a period. Thus the first third-level section in the first secondary section of the fourth section of a report would have the following numerical designation—4.1.1. This heading number as in major and secondary headings is separated from the heading words by two blank spaces. The first and all other important words are capitalized but the heading is not underlined. The words of the heading are followed by a period and after two blank spaces by

the text of the section unless there are fourth-level headings. Generally one should double-space between the tertiary heading and any one of the following: secondary heading, another tertiary heading, or a fourth-level heading. If the tertiary heading is the last heading in a major section, two blank line-spaces separate it from the next major heading.

- 2.3.13.8. Fourth-level headings. Fourth-level headings begin with a statement of the heading number. Flush left with the left margin, the heading number contains four numbers: the major section number the secondary section number, the tertiary section number, and the number of the specific fourth-level section. Bach of these numbers is followed by a period. The number of this section illustrates a fourth-level heading number. The words of the fourth-level heading are separated from the number by two blank spaces and are followed by a period, two blank spaces and then the text of the fourth-level section. Only the first word is capitalized. Vertical spacing rules governing tertiary headings apply here as well.
- 2.3.13.9. Headings below the fourth level. No headings below the fourth level should be used.
- 2.3.12.10. Headings for figures and tables. Headings for figures and tables include the statement of the word figure or table, of which only the first letter is capitalized. The figure or table section and item numbers followed by the heading title capitalized as a third-level heading (see 2.3.12.7.).
- 2.3.14. Binding. The reproduced technical report will be securely fastened along the left edge. The usual binding will be side or saddle-wire stitching. Loose leaf, spiral, plastic comb and post bindings will not be used. Cloth back-strip (binding tape) will be used only when it serves a protective purpose (para 9-le(3), AR 310-1).
- 2.3.15. Numbers in the text.
- 2.3.15.1. General. As a general rule, numbers should be presented in figures rather than in words. One exception is at the beginning of a sentence. If the number requires no more than one word to state, it may begin a sentence. If at all possible, however, the sentence should be recast. Occasionally it is also acceptable to write out numbers that require no more than a single syllable to state. The GPO Style Manual offers these important guidelines. Rule 12.4 states: "A figure is used for a single number of 10 or more with the exception of the first word of a sentence."(2) Rule 12.5 reads: "Figures are used in a group of 2 or more numbers, or for related numbers, any one of which is 10 or more. The sentence will be regarded as a unit for the use of figures."(2)
- 2.3.15.2. Punctuation. The GPO <u>Style Manual</u> offers this advice on the use of commas in long numbers in paragraph 12.14: "The comma is used in a number containing four or more digits, except in serial numbers, common and decimal fractions, astronomical and military time, and kilocycles and meters if not more than four figures pertaining to radio."(3)

- 2.3.15.3. Fractions. Only when fractions stand by themselves or are followed by of a or of an, they are spelled out. In most other cases, especially in unit modifiers (as in  $\frac{1}{2}$ -in. pipe), fractions are stated as figures. The typewriter keys stating fractions should be used; fractions may also be stated as full-sized figures separated by slash marks.
- 2.3.15.4. Dimensions. Dimensions should be stated in figures. When giving dimensions, the writer should use the appropriate abbreviations to denote proper measurements and should be careful to follow these measurement abbreviations with additional abbreviations such as lg for long, w for wide, and h for high.
- 2.3.15.5. Numbers and lists. Numbers are used with lists only when one wishes to establish priority either of importance or sequence among items. This applies to both "run-in" lists (lists in the main text) and indented "set-off" lists (See also 3.2.2.2.). Generally, these item numbers are placed in parentheses and are separated from the item itself by two blank spaces.
- 2.3.16. Pagination.
- 2.3.16.1. Placement. Page numbers are to be centered at the bottom of the page on a line that is 1 inch above the page bottom.
- 2.3.16.2. Notices. No page number is listed at the bottom of the "Notices" page. The Notices page is always to be printed on the inside of the front cover.
- 2.3.16.3. DD Form 1473, other front matter, body of report, list of references and bibliography. Beginning with the Report Documentation Page (DD Form 1473) as page 1, report pages are numbered consecutively in ascending Arabic numerals through the bibliography. Section numbers do not precede the page numbers. The first page (the DD Form 1473), the Table of Contents, the List of Tables, the List of Illustrations, the first page of the report body (the Introduction), the List of References, and the Bibliography are always right-hand pages even when report pages are printed on both sides.
- 2.3.16.4. Appendices. Pagination in an appendix includes both the capital letter used to designate the appendix and an Arabic numeral. Pages are lettered and numbered appropriately and consecutively in ascending Arabic numerals beginning with the title page for the Appendix as the first page. The cover sheet of an appendix is not numbeered. Appendicies are identified by capital letters: the first appendix is Appendix A, the second is Appendix B, and so forth. Thus, the first page in the first Appendix would be designated as "A-l" while the fourth page in a third appendix would be designated as "C-4." A hyphen is placed between the letter and number. The cover and first page of an appendix are always right-hand pages. If the pages of an appendix are already numbered and the original numbers of these pages are of no use to the reader, the numbers are deleted and the new page numbers are inserted. If both sets of page numbers are needed (and this is rare), the appendix designations (letter and number) are centered directly below the original number. (See Appendix A of this manual).

- 2.3.16.5. Glossary. A glossary is useful in a report that uses many technical terms that need definitions (See Appendix B for aid in writing definitions). Pages in this section begin a new sequence of ascending Arabic numerals, and, each numeral is preceded by the capitalized word Glossary and a hyphen. Thus, the second page in a glossary would be designated as "Glossary-2." This designation is centered one inch above the bottom of the page.
- 2.3.16.6. List of abbreviations, acronymns, and symbols. Pages in this report section begin a new sequence of ascending Arabic numerals, and each numeral is preceded by the capitalized word abbreviations and a hyphen. Thus, the fifth page in this section would be designated as "Abbreviations-5." This designation is centered one inch above the bottom of the page.
- 2.3.16.7. Index. An alphabetical index of key terms is often useful in a long report. When it is included, each of its consecutively numbered pages is preceded by the capitalized word *index* and a hyphen. The pages include a new sequence of numbers beginning with the first page of the index which will be designated as "Index-1." All page designations are centered one inch above the bottom of the page.

#### 3.0. PUNCTUATION AND CAPITALIZATION

#### 3.2. General

Rules governing punctuation and capitalization—or what is also called mechanics—ideally help to clarify the meanings of single words and statements. The following paragraphs, therefore, provide specific advice on those areas of mechanics that can cause problems for the technical writer. Certain rules are not treated for one or two reasons: either they rarely apply in engineering report writing (such as those governing apostrophies and quotation marks), or their proper usage is widely known (such as the rule specifying the placement of a period at the end of a sentence). In sum, the rules below do not specify all uses of each punctuation mark and all cases when capital letters are used; they rather point out problem areas.

#### 3.2. Punctuation

- 3.2.1. Period.
- 3.2.1.1. Headings. Periods are used after each number that precedes a heading title. Periods are only used after heading titles when text directly follows the heading title (as in this item).
- 3.2.1.2. Spaced periods. Spaced periods are used between titles and correspondent page numbers in the Table of Contents in the List of Illustrations, and in the List of Tables. The first spaced period is placed one space after the last word of the title and the last spaced period is placed in the space immediately preceding the space below the letter p in the heading Page.
- 3.2.1.3. Abbreviations. Periods are not used after abbreviations unless the abbreviation spells a word. Thus one would write yd, US, and ft instead of yd., U.S., and ft.; but would write -in. to abbreviate the word inch.

- 3.2.1.4. Periods and quotation marks. Periods are always placed inside quotation marks.
- 3.2.1.5. Periods and parentheses. If the material in a parenthetical statement is a complete sentence and follows a completed sentence, a period is placed inside the second parentheses, and a period comes at the end of the preceding sentence. If the parenthetical material is a complete sentence and interrupts another sentence, it contains no period. If the parenthetical material is not a sentence and yet comes at the end of another sentence, there is no period following the sentence which precedes it; the period follows the parentheses.
- 3.2.2. Comma.
- 3.2.2.1. Numbers. (See para 2.3.14.2.)
- 3.2.2.2. Clauses. Comma usage varies with different types of clauses. A clause is a group of words containing both a subject and a verb. Independent clauses can stand by themselves as sentences. Dependent adverbial and adjective clauses must be attached to independent clauses. Commas should be placed as follows: (1) after the first independent clause in a compound sentence (that is, a sentence composed of at least two independent clauses); (2) after an introductory adverbial clause; and (3) both before and after a nonrestrictive (non-essential) adjective clause.
  - Ex. (1) The engineers studied the needs of the organization, and then they proposed a solution.
  - Ex. (2) After studying the needs of the organization, the engineers proposed a solution.
  - Ex. (3) This plastic battery box, which Blowhard helped us design, helps us save money.
- 3.2.2.3. Series. A comma is used after each item in a series preceding the word <u>and</u>.
  - Ex. Track components in a combat vehicle consist of end connectors, center guides, shoes, and connecting pins.
- 3.2.2.4. Coordinate adjectives preceding a noun. A comma is used to separate coordinate adjectives preceding a noun when the and is omitted.
  - Ex. This fast, efficient method should be explored.
- 3.2.2.5. Introductory participial phrases. A comma is used after an introductory participial phrase.
  - Ex. Designed to replace the metal fuel tanks in 5-ton trucks, these plastic tanks are safe and cost-efficient.

- 3.2.2.6. Conjunctive adverbs. A conjunctive adverb (thus, however, therefore, nevertheless, clearly, and so forth) is (1) followed by a commas when it begins a sentence and (2) set off by commas when it interrupts a sentence.
  - Ex. However, this procedure is more expensive than rotocasting.
  - Ex. This procedure, however, is more expensive than rotocasting.

#### 3.2.3. Colon.

- 3.2.3.1. Colons and lists. A colon is used to introduce a list of items if the list is relatively short and is run into the text (either with or without numbers). If some priority of sequence or of importance is to be noted, each item is preceded by an Arabic numeral beginning with 1. The numbers are enclosed in parentheses. A colon is also used to introduce lists of items that are indented five spaces from each margin and preceded by either numbers or "bullets" (See para 2.2.8.). Usually these items are not complete sentences. When the items are complete sentences, a period is placed at the end of the text material before the indented list. (See also para 3.2.4.)
- 3.2.3.2. Colon and emphasis. Placing a colon before a list of items certainly emphasizes the importance of those items. A colon is also used to give emphasis to a sentence following it. Usually the sentence introduced by the colon in some way explains or clarifies the information presented in the sentence preceding the colon.
- 3.2.3.3. Colons in proportions and ratios. Single colons are used among elements of a proportion (as in a 5:2:1 mixture). Double colons are used to show ratios.
- 3.2.4. Bullets. Listed items are "bulleted" for emphasis. A bullet is especially useful when one wishes to list items of equal importance. A "bullet" is made by typing a lower case  $\underline{o}$  and filling it in. The first two sections of this manual (§\$1.0. and 2.0.) both contain bulleted lists. Use the guidelines below when "bulleting" items.
  - o Indent the material five spaces from each margin. The sixth space of the first line begins with a bullet followed by two blank spaces (as illustrated here).
  - o Skip one line space between bulleted items if the items are completed sentences or if they follow a complete sentence (or several lines of text as in \$1.0.).
  - o Skip no space between bulleted items if they directly follow headings or other incomplete sentence structures (as in para 2.2.1.)

- 3.2.5. Parentheses and Brackets.
- 3.2.5.1. Parentheses. Parentheses are used to inclose the following: each item number in a list based on sequence of importance, a "list of references" number (see para 7.2.), a cross-reference instruction containing the word see and a heading number, and text material that briefly interrupts the grammatical or logical flow of a sentence.
- 3.2.5.2. Brackets. Brackets are used to inclose the following: the word sic which placed directly after an error in quoted material and mathematics material that is "to be treated as a unit" (2).
- 3.2.6. Italics. The typewriter equivalent of printed italic type is underlining. The following types of material are underlined: secondary headings and titles of long publications such as books and extended reports, words referred to as words (as in "Capitalize the word table").
- 3.2.7. Hyphen. The typed hyphen is used as follows in technical writing: between elements of some compound nouns and unit modifiers (see 4.2. below), in chemical formulas (see GPO Style Manual, \$\$6.43. and 6.44.), and at the end of a line to indicate word division. Use a double hyphen with no spaces between letters of two words for a dash--as compared to a space-hyphen-space.
- 3.2.8. Odds and Ends. Using the word degrees or the degree sign  $(^{\circ})$  before F or C is unnecessary. The quotation mark  $(^{\circ})$  should not be used to designate inch(es); use in. The apostrophe should not be used to designate feet; use ft without a period. The pound sign (\*) should not be used for either pound or number. Use standard alphabetic abbreviations.

# 3.3. Capitlization

- 3.3.1. General. Section 4 of the GPO Style Manual offers an extensive list of words that should be capitalized.
- 3.3.2. Capitalization of Headings. (see \$2.3.12. of this report).
- 3.3.3. Capitalization of Proper Names. All proper names and derivatives of proper names unless they have "acquired independent common meaning" (see GPO Style Manual, \$3.4.) are capitalized. A common noun used as a shortened form of a clearly specified proper noun is also capitalized (as in using the word command to refer to the US Army Tank-Automotive Command).
- 3.3.4. Capitalization of Abbreviations. Capitalization of abbreviations should generally follow capitalization of the word or words abbreviated.

#### 4.0. ABBREVIATING AND COMPOUNDING

### 4.1. Abbreviating

Spell out the word the first time an abbreviation is used. This is to insure that the audience understands exactly the word being used. MIL-STD-12C (abbreviations for use on Drawings, Specifications, Standards and in Technical Documents) allows the use of the same abbreviation for several words,

e.g., G or g is used for girder, glass, glyptal cloth, gravity, grounded (outlet), single glass and gram. Therefore, always spell out the word the first time it is used. Show the abbreviation in parentheses immediately following the word. Then be consistent—use the abbreviation throughout the remainder of the document.

In general, abbreviations will be used without periods. For example: yd, ft, para. In the case where an abbreviation spells a word, as in inch, use the period, e.g., -in. Some common abbreviations are:

4.0			
AC	alternating current	kC	kilocoutomb
AH	ampere-hour	kg	kilogram
AM To all	amplitude modulation	kg∙m/s	kilogram meter per second
a.m.	before noon (ante meridiem)	kJ/kg	kilojoule per kilogram
AMP	ampere	km2	square kilometer
app	appendix	kPa	kilopascal
Btu	British thermal unit	k٧	kilovolt
BHP	brake horsepower	kW	kilowatt
0	Celsius (centigrade)	Ĺ	liter
CFM	cubic feet per minute	16	pound
ch, chs		lb-ft	pound foot (force or torque)
cm	centimeter	lbF/ln.2	<sup>2</sup> pounds force square inch
c/m	cycle per minute	L/h	liters per hour
СР	candlepower	L/100km	liters per hundred kilometers
CU	cubic	М	Mega
cu-ft	cubic foot (use the same	m	milli or meter
cu-In	for cu-yd, etc.)	mΑ	milliampare
CV	constant velosity	mH	millihenry
cwt	hundredweight	MHz	megahertz
mg/L	milligram per liter	m l	mile(s) - (or M if used with
dB	decible		other technical terms - as in
dBu	decible unit		miles per gallon, then MPG)
DC	direct current	min	minute(s)
EFM	electromotive force	MJ	megajoule
F	farad	mpg	miles per gallon
F	fahrenheit	mph	miles per hour
		mm	millimeter
fig.,	figure(s)	mΤ	millitesia
flgs.		mV	millivolt
FM	frequency modulation	mWb	milliweber
-ft	foot (feet)	m2	square meter
ft-16	foot-pounds (work)	m3	cubic meter
G	gravity	NA	not available (not applicable)
g	gram	N.M.	Newton meter
g/CFM	gram per cubic feet per	no.	number(s)
	minute	Nos.	
GHP	gross housepower	P,pp	page(s)
GHz	gigahertz	para.	paragraph(s)
Hg	mecury	paras	par agraphica?
hr	hour (or H if used with	PTO	power-takeoff
	other technical terms - as	RPM	revolutions per minute
	In miles per hour, then		second(s)
	MPH)	uF	microfarad
Hz	Hertz	v	Volt(s)
IF	Intermediate frequency		volume(s)
-1n	Inch(es)	W	watt
J	jole	w/	watt with
K	Kelvin	w/o	
k	kilo (thousand)	-	without
•	o (mousang)	-yd	yards

## 4.2. Compounding

A compound word is a union of two or more words, either with or without a hyphen. It conveys a unit idea that is not clearly or quickly conveyed by the compound words in unconnected succession. The hyphen in a compound is a mark of punctuation that not only unites but separates the component words, and thus facilitates understanding, aids readability, and insures correct punctuation.

#### 4.2.1. General Rules.

1. In general, omit the hyphen when words appear in regular order and the omission causes no ambiguity in sense or sound.

Examples: banking hours patent right oil pressure

2. Words are usually combined to express a literal or nonliteral (figurative) unit idea that would not be as clearly expressed in unconnected succession.

Examples: afterglow right-of-way

3. Unless otherwise indicated, a derivative of a compound retains the solid or hyphenated form of the original compound.

Examples: coldbloodedness

footnoting X-rayer Y-shaped

4. Except after the short prefixes co, de, pre, pro, and re, which are generally printed solid, a hyphen is used to avoid doubling a vowel or tripling a consonant.

Examples: cooperation

deemphasis
micro-organism
ultra-atomic

5. Print solid two nouns that form a third when the compound has only one primary accent, especially when the prefixed noun consists of only one syllable or when one of the elements loses its original accent.

Examples: airship

footnote locksmith crewman

6. Print solid a noun consisting of a short verb and an adverb as its second element, except when the use of the solid form would interfere with comprehension.

Examples: blowout

flareback

markoff

but cut-in

run-in

tie-in

7. Compounds beginning with the following nouns are usually printed solid.

Examples: book house school way eye mill shop wood horse play snow work

8. Compounds ending in the following are usually printed solid, especially when the prefixed word consists of one syllable.

Examples: berry keeper piece weed wide blossom keeping power boat light proof wise book like woman room borne maker shop wood bound work making smith brained man stone worker bush master store working fish mate tail worm flower mill tight wort time(not clock) writer grower mistress hearted monger ward writing holder owner yard way house

9. Print solid any, every, no, and some when combined with body, thing, and where; when one is the second element, print as two words if meaning a single or particular person or thing; to avoid mispronunciation, print no one as two words at all times.

Examples: anybody everybody somebody anything nothing something no one someone everyone

4.2.?. Unit Modifiers. Print a hyphen between words, or abbreviations and words, combined to form a unit modifier immediately preceding the word modified, except as indicated in para 4.2. This applies particularly to combinations in which one element is a present or past participle. Below is a list of rules for using hyphens in unit modifiers.

1. Do not use a hyphen in a unit modifier consisting of two nouns.

Examples: gust front conditions storm research programs

2. Use a hyphen in a unit modifier consisting of an adjective and a noun, a noun and an adjective, or an adverb and an adjective.

Examples: dual-wavelength radar above-average frequencies

Exception: Print without a hyphen a two-word modifier the first element of which is a comparative or superlative, e.g., higher level decision.

3. Use a hyphen in a combination of color terms used as a unit modifier.

Example: Silver-gray body

4. Use a hyphen in a combination that contains numbers.

Examples: three-dimentional model two-axis anemometer

5. Use a hyphen when a connecting word is implied.

Examples: north-south alinement air-sea interaction winter-fall maxima

6. Use a hyphen in an improvised compound containing a verb, or three (or more) words.

Examples: jack-up capability cloud-to-ground strokes roof-to-wall connection

7. Use a hyphen in a unit modifier containing a present or past participle (or words in -ed and -ing forms).

Examples: broad-based support river-crossing maneuvers many-faceted research

8. Do not insert a hyphen in a proper name, but use an indicated hyphen when the phrase is used generically.

Example: Severe Thunderstorm Watch but severe-thunderstorm watch

9. Do not use a hyphen in a unit modifier containing an adverb ending in -ly. Use a hyphen in those containing the adverb well, still, or ever.

Examples: well-kept laboratory still-new dynamometer

Exception: Do not use a hyphen even with those words when they are modified by another adverb, e.g., very well kept laboratory.

- 4.2.3. Technical Terms. Print a hyphen between the elements of technical compound units of measure.
  - (a) passenger-mile
  - (t kilowatt-hour
  - (c) horsepower-hour
- 4.2.4. Numeric Compounds. Use a hyphen between elements of compound numbers from twenty-one to ninety-nine and in adjective compounds with a numeric element first.
  - (a) twenty-one
  - (b) twenty-first
  - (c) 3-1 ratio
  - (d) 24-inch ruler
  - (e) 8-hour day
- 4.2.5. Fractional Numeric Compounds. Use a hyphen between the elements of a fraction, but omit it between the numerator and denominator when the hyphen appears in either or both.
  - (a) one-thousandth
  - (b) two one-thousandths
  - (c) three-fourths of an inch
  - (d) two-thirds
  - (e) twenty-one thirty-seconds
- 4.2.6. Capital Letter Words. Use a hyphen to join a single capital letter to a noun or participle.
  - (a) H-bomb
  - (b) I-beam
  - (c) V-necked
  - (d) X-ray
  - (e) T-shaped
  - (f) T-square
  - (g) V-blade
- 4.2.7. Improvised Words. Print a hyphen between elements of an improvised compound.
  - (a) blue-pencil
  - (b) state-of-the-art
  - (c) 18-year-old
  - (d) know-how

#### 5.0. SPELLING

# 5.1. Spelling Called for by Government Printing Office Style Manual

In general, the *preferred* spelling of Webster's International Dictionary is to be followed. Items listed here either indicate spelling peculiar to the Army (called for by the Government Printing Office \*GPO\*) Style Manual) or items generally misused in manuscripts.

## Affect, effect

- (a) affect denotes influence, operation, action upon, concern.Always a verb.
- ex. This adjustment affects the length of clutch pedal free travel.
- (b) effect denotes consequence of result (noun); bring about, carry out, fulfill (as a verb).
- ex. Noun: The effect of PM will be this: Your truck will be ready to go.

Verb: This rule will effect a change.

Aline - this is correct. Do not spell it "align."

All right - not alright.

Dipstick - is spelled as one word.

Disk - is the preferred spelling. Do not use disc.

Fuse - to denote melting together or an electrical safety device.

Fuze - is the device used to initiate detonation or to start flame.

Gage - is the preferred spelling. Do not use "gauge."

Insure - preferred spelling. Do not use "ensure."

Material - parts, goods, or stock of which anything is composed or made.

Materiel - supplies, stores and equipment of all types used by Armed Forces including instruments, vehicles, clothing and ammunition.

### Permissible

Pickup - referring to a type of truck.

Pick-up - a noun denoting action.

Power-takeoff - the word "takeoff" when used with "power" is one word.

Safetied - has an "e" between the "f" and "t".

Tailgate - is spelled as one word.

Taillight - is spelled as one word.

## 5.2. Word Easily Misspelled

This section presents, clearly and succinctly, the basic information about some of the most commonly misspelled words.

5.2.1. Double Consonants. A single consonant following a single vowel and ending a monosyllable or a final accented syllable is doubled before a suffix beginning with a vowel.

Bag, bagging, bagged.

Corral, corralling, corralled.

Occur, occurring, occurred.

Permit, permitting, permitted.

Red, reddish.

Refer, referring, referred (but not reference).

Auxiliary (only one "l").

Control, controlling, controlled.

Generally.

Level, leveling, leveled.

Parallel, paralleling, paralleled.

Travel, traveling, traveled.

Cancel, canceling, canceled.

Label, labeling, labeled.

If the accent in a derivative falls upon an earlier syllable than it does in the primitive, the consonant is not doubled.

Refer, reference. Prefer, preference. Infer, inference.

5.2.2. Endings "cede", "ceed", and "sede".

Only one word ends in "sede" (supersede).

Only three words end in "ceed" (exceed, proceed, and succeed). All other such words end in "cede" (precede, secede, etc.).

#### 6.0. READABILITY

## 6.1. Standards (DARCOM-P 310-10 and DA Cir 310-9)

The standards described in the above listed documents are part of a long-range program to improve the Army publications system. The policy, through the use of "small words and phrases," is designed to improve the readability of publications by preparing the message in understandable and usable language. Both documents contain a list of small words or phrases you can use rather than a sometimes more obtuse polysyllabic word.

# 6.2. Word Choice

6.2.1. Using Simple Language. Official writing does not demand big words or fancy phrases. Write naturally—in the words you use to speak. The sense and strength of English is in its small, often one-syllable words. Not only do they save preparation time, they improve the vigor of your writing and the clarity of your ideas.

Instead of	<u>Try</u>
accomplish	carry out
accordingly	so
actual	real, true
as a result of	because of
consideration should be given to the fact that	note, or note that
despite the fact that	although, though
due to the fact that	due to, since
facilitate	ease, help
goes without saying	(unnecessary - leave out)
in accordance with	with, or per
in regard to	on, about, concerning
in view of the fact that	because, as
perform	do
provided that	if
regarding	about, of, on
render	give, make
therefore	so
there are (there is)	(leave out)
until such time as	until
(the) use of	(leave out)
utilize, utilization	use
viable	workable

#### 6.2.2. Avoid Work Confusion Errors.

all ready (prepared) already (previously) all together (collectively) altogether (completely) awhile (for some time) a while (a short time) ascent (rise) assent (consent) born (birth) borne (carried) capital (city) capitol (building) casual (unimportant) causal (resulting) complement (completing) compliment (praise) councilor (of council) counselor (advisor) device (gatget) devise (plan, contrive) discreet (prudent) discrete (distinct) dyeing (coloring) dying (ceasing to live) elicit (to draw) illicit (illegal) envelop (to wrap up or in) (v.) envelope (the wrapper) (n.) expose' (a revealing) (n.) expose (to lay open) (v.)

farther (distance) further (not distance) indict (to accuse) indite (to compose) inequity (unfairness) iniquity (sin) ingenious (skillful) ingenuous (simple) mil (1/1000-inch) mill (1/1000 dollar) peremptory (decisive) preemptory (seizing) perquisite (privilige) prerequisite (requirement) personal (individual) personnel (staff) perspective (view) prospective (expected) precedence (priority) precedents (usage) principal (chief) principle (proposition) sometime (formerly) some time (some time ago) sometimes (at times) spacious (space) specious (plausible) stationary (fixed) stationery (paper)

#### 6.2.3. Overworked Words an Phrases to be Avoided in Writing

effect, effected (as a verb) etc. (spell out what you mean) focal point ideal, ideally immeasurable implement(ed) (as a verb) render unacceptable vital vast very extremely excellent commence reflect image finalization to include (including)

#### 6.3. Sentence Structure and Grammar

Sentences, not words, are the essence of writing, just as equations and functions, and not bare numbers, are the real guts of mathematics. Most English sentences are made with a subject, verb and direct object. The subject is a noun or a noun equivalent (pronoun, noun clause, gerund, infinitive) that is the starting point of the statement. A verb is a word that has forms (like go, goes, gone, going) and in a sentence agrees with the subject. In a typical sentence the verb follows the subject and, like the subject, is often the nucleus for modifying words. The direct object of a verb is a word or group of words, usually following the verb, that names the recipient of the act expressed by the verb. It answer the question asked by adding "what" or "whom" after the verb. The complement is a noun or adjective in the predicate which follows a linking verb. In contrast to an object, a complement is related to the subject rather than the verb, for it follows verbs expressing condition rather than direct action. The typical order of the main sentence elements is subject, verb, object (or subject-linking verb-complement); and is the order in which we make most statements and the means by which we understand them.

- 6.3.1. Tense. The subject of a sentence or clause determines the verb form that goes with it. Correspondence between subject and verb is called agreement. Since, for the most part, English verbs have only two tenses (past and present), there should be relatively few problems with agreement. Tense of verbs must be consistent with the subject of the sentence and with other verbs in a passage. By using different tenses, a writer sets the time of the situation he is describing, and also indicates for the reader the continuity of the action or explanation. It is important that the verb tenses are consistent and easy to follow. Use of the proper verb tense is essential if the reader of a Technical Report is to know if events being discussed have happened, are happening now, or will happen sometime in the future. Here are some guidelines to follow when preparing a report:
- o The aim of the introduction is to provide a definition of the work effort to be discussed and background concerning circumstances and events which prompted the work. Thus, the introduction deals almost exclusively with events in the past and, with the exception of such statements as "the purpose of this report is \_\_\_\_\_\_," should be written in the past tense.
- o The main body, summary, and conclusions of the report each has one thing is common: They all deal with what has already taken place (completion of laboratory or field tests, etc.) and should also be expressed in the past tense.
- o Present and future tense verb forms are appropriate for that portion of the report dealing with recommended future courses of action.
- 6.3.2. Voice. In scientific writing, the whole point is to emphasize the action taken and downplay the person who did it. English grammar has two voices (of the verb)--active and passive. A verb in the active voice is a normal, simple-type verb that emphasizes the person performing the action: i.e., he runs dynomometer tests. The passive consists of a form of to be plus the past participle: i.e., dynomometer tests are run (by him). Passive verbs are natural if the subject is unknown or unimportant. And we've just said that in scientific writing, the performer is unimportant to the experiment or project.

Therefore, it is advisable to not use personal pronouns. This will force writers into heavy use of the passive voice, and thereby, preparing a Technical Report describing events and actions rather than stressing the importance of the individual who performed the various tasks.

- 6.3.3. Parallel Elements. One way to clarify and simplify your message is by being consistent with the use of parallel elements. Where there are two items of the same type in a sentence or paragraph, the structure of the items should be as similar as possible. Conjoined items (linked by and), in a list should be of the same type and have the same structure.
- 6.3.4. Emphasis. The proper place in the sentence for the word or groups of words that you want to make most prominent is usually at the end. The other prominant position in the sentence is the beginning. Any element in the sentence other than the subject becomes emphatic when placed first. The principle that the proper place for that which the writer wants to emphasize is at the end applies equally to the words of a sentence, the sentences of a paragraph, and the paragraphs of a composition.
- 6.3.5. Wordiness. Good writing is concise. A sentence should contain no unnecessary words, a paragraph no unnecessary sentences, and a composition no unnecessary paragraphs. This requires that the writer make every word tell. It does not mean he should make all his sentences short, or omit detail and treat his subject only in outline. The writer should question every word. If it doesn't carry its weight, don't use it.

Example: The use of "of" in such sentence construction as all of the samples or some of the units serves no useful purpose. The word "of" adds nothing to the main idea. A better way would be: all the samples or some units.

Phrases and connectives also add unnecessary words.

### Instead of

in order to owing to the fact that in spite of the fact that this is the subject that used for fuel purposes in accordance with

#### Try

to since (because) though (although) this subject used for fuel by, under, per, according to

#### 7.0. DOCUMENTATION

#### 7.1. Using Footnotes

Place the footnote number immediately following and half a line above the quoted or paraphrased material, like so:6

- 7.1.1. In the Text. Footnotes in the text are numbered consecutively from 1 to 99, and then begin with 1A1 to 1A99. The footnotes are to be listed on a separate page at the end of the document. The separate page will be titled "List of References". In the event there are less than four footnotes in the report, they may appear on the same page as the material referenced rather than on a "referenced" page. When footnotes are on the same page as the referenced material, a cutoff dash is required between the text and footnote. This dash starts two spaces below the text at the left margin stop and is  $1-\frac{1}{2}$  inches long. If two or more footnotes apply to the same page, double space between each footnote.
- 7.1.2. In Tables. Footnotes to table material are numbered independently from footnotes to the text. Each table will carry its own footnote numbering sequence. To avoid confusion with table numberals (especially in capital letters). The order of symbols should be as follows: asterisks (\*), dagger (\*), double dagger (\*\*), section marks (§), and parallel (//). If such symbols are difficult to reproduce, capital letters may be used. Footnotes are to be placed, with the symbol or letter flush-left, and the footnote material following with one space between the symbol/letter and the material. Footnotes are to appear in block style with the author's last name first, "title" of the source, publisher, publisher's geographical location, page number, and (date). Footnotes will be divided from the text of the table by a cutoff line 1-½ inches long starting at the left margin of the table. If two or more footnotes apply to the same table, one single space is left between entries.

#### 7.2. Preparing the "List of References"

The list of references is the list of footnotes from the text. Entries are listed in numerical order as cited in the text. This is always a separate page at the end of the report.

The format for footnotes will show the sequence number in parentheses, the author (last name first), "title" (in quotes), publisher, publisher's geographical location, page, and (date). See below and p 48.

(1) Wallace, J.D. and Holdings, J.B., "Guide to Writing and Style", Batelle Memorial Institute, Columbus, OH, p 79, (1966)

#### 7.3. Including a Bibliography

A bibliography is a list of selected sources the writer consulted to complete the project. This is arranged alphabetically by author's last name. When the author's name is not available, the title of the work is listed first, in the same alphabetical order. In some ways a bibliography repeats the information contained in the footnotes (or material on the "Reference" page); however, it provides the reader with an alphabetical index for quick reference. It lists not only footnooted sources, but all sources consulted. The entries include books, newspaper and magazine articles, research reports, etc.

Each entry is single-spaced, the second and all subsequent lines are idented five spaces, and double spacing separates individual entries (See p 49). Guidelines for arranging the bibliography are:

- o Lannon, John M., "Technical Writing", Little, Brown and Company, Boston, MA (1979)
- o MIL-STD-847A, "Format Requirements for Scientific and Technical Reports Prepared by or for Department of Defense", (1973)
- o "Lightweight Tow Bars", Army Research, Development & Acquisition Magazine, (November-December 1981)

## 7.4. Including an Index

An index is not required, but for some long reports (over 50 pages) it may be desirable. If used, the index should list pertinent subjects under every topic for which users are likely to look. Topics are listed alphabetically. The index is to be constructed to enable the user to locate easily any part, information, or topic in the text.

#### 8.0. EDITING

The Technical Editor's office is to make sure that technical reports clearly convey and effectively document objectives, conclusions, recommendations, materials and methodology of engineering projects. The one effective way to insure the standards for reports are followed is to provide an editorial review for all technical reports. The authors and typists, no matter how competent in their fields, can not be expected to produce a report according to particular editorial standards. The editor (through training, natural talent or both) is a master with the English language; and is sensitive to the consistency in format, abbreviations and detail. The author, or technical reviewer, verifies technical accuracy; the editor insures that the material presents the author's ideas cleary and concisely. Therefore, no matter whether the manuscript is produced by in-house writers or by contractors, it is to be edited by people familiar with the types of regulations and recommended pratices given in this style manual.

Contract monitors, therefore, should be reminded that when a formal report is required, the contract must include provisions (and funding) for a preliminary draft, to allow for editorial changes and final printing.

### 8.1. Relationship between Editor and Writer

The editorial review, then, is the first step on the road to a finished product. The Editor must insure that the specific rules and policies (MIL-STD-847A) are followed concerning the elements of a report. The Technical Editor's first concern, however, is to help an author produce an excellent report. This concern requires the Editor to attend to many small details (requiring copy editing) and to various larger considerations (requiring content editing or rewriting). While straight grammatical editing—for spelling, punctuation and sentence structure—is necessary, the Editor is also concerned with the larger things: Making a report as good as possible, and helping the author to be a better writer.

Good Relations between the author and the editor are essential to produce a good report. As with any relationship between two people, each party must take responsibility for making the relationship work. If one party is uncooperative, the other job, becomes very difficult. Just as editors are language experts, authors are technical experts. They must be the final judges of the content of their report, assuring completeness, accuracy, and relevance. An editor may always suggest changes, but the author must take the final responsibility for the technical content. For both parties to obtain their goal—an excellent report—good relations are essential.

The editor who is without specific technical knowledge should be wary of making arbitrary changes in language that might change technical meaning. An editor might make a lovely sentence out of an awkward one by repositioning clauses and phrases; when this is done, however, technical meanings might be changed. The editor should make certain, by question marks or lists of questions with page numbers, that the author sees every major change.

Likewise, the author must read both the edited manuscript and any proof copies with great care to make sure errors do not creep in. It is important for the author to check all numbers, whether statistics, references to figures, tables, or footnotes. Tedious though it may be, this task is vital, and this is the time for changes, not later after the report is printed.

## 8.2. Relationship between Editor and Typist

Most of the marks on the manuscript are formating instructions to production people, i.e., typists and word processor operators and are, therefore, not substantive changes. Usually these marks indicate formating errors. Formating procedures are found in para 2.3. in this report. Standard proofreading symbols used by the technical editor are found in para 8.3. below. It is essential that both the production people and the technical editor become extemely familiar with proofreading symbols.

By being able to use these symbols consistently, both the editor and the production people will be able to finalize the report and achieve the goals for which the report is written; that is to make it clear, concise and complete, correct and technically accurate with as few trips through production department as possible.

#### 8.3. Proofreading Symbols

In reviewing a manuscript, the technical editor will use the conventional proofreading marks. Shown below are the marks that are most often used. They should be legibily written in the margin and the place of the desired correction should be clearly marked in the text.

- 1. Missing punctuation insert it.
  - e.g. The period is missing
  - e.g. In this case the comma is missing.

2.	Incorrect punctuation - cross it out and insert correct punctuation.
	e.g. After I wrote the sentencers proofread it.
3.	Misspelled or mistyped words - cross out or circle and write in correction
	e.g. This word is mispelled misspelled
4.	To delete a word, use
	e.g. Please file the the report.
5.	Word lined out in the text, you want to let it stand.
	e.g. Let it standused in the margin. STET
	e.g. Let it standused in the text
6.	Lower case a letter by drawing a diagonally slanted line through it.
	e.g. The car won't start.
7.	Capitalize a letter by underling it with three strokes.
	e.g. We work for the federal Government.
8.	Close up a space by using or or.
	e.g. Please lock the car when ever you leave.
9.	Insert a space by using 7.
	e.g. The truck will be here later.
10.	To indicate a new paragraph, use $\mathscr{P}$ .
11.	
	e.g. The Ais on table.
12.	Transposed letters or words, use ${\cal N}$ .
	e.g. The truck is on the rack.
13.	To move copy left, use
	e.gUse a left facing bracket to move copy left.
14.	To move copy right, use
	e.g., Use a right facing bracket to move copy right.

# LIST OF REFERENCES

- (1) Lannon, John M., "Technical Writing", Boston, MA: Little, Brown and Company, (1979)
- (2) MIL-STD-847A, "Format Requirements for Scientific and Technical Reports Prepared by or for Department of Defense", (1973)
- (3) US Government Printing Office Style Manual, Rev Ed, Washington, US Government Printing Office (1973)
- (4) Sherman, Theodore S., and Johnson, Simon S., "Modern Technical Writing", 3rd Ed, Englewood Cliffs, NJ, Prentice-Hall, Inc (1975)
- (5) Webster's "Seventh New Collegiate Dictionary", G. C. Merriam Company, Springfield, MA (1967)

THIS PAGE LEFT BLANK INTENTIONALLY

#### SELECTED BIBLIOGRAPHY

- AR 70-31, "Research and Development Standards for Technical Writing", HQ, Dept of Army, (1966)
- Boblenz, James N., "Tank-Automotive R&D Center Laboratory Technical Report Style Manual", US Army Tank-Automotive Command Warren, MI (1981)
- Collier, Barbara S. and Joes, E. Ellen, "Guides to ERADCOM Formal Reports", US Army Electronics Research and Development Comand, Adelphi, MD (1979)
- Gunning, Robert, "Techniques of Clear Writing", McGraw-Hill Book Company (1968)
- Government Printing Office Style Manual, Rev Ed, Washington, D.C.,
  US Government Printing Office
- Hays, Robert William, "Principles of Technical Writing", Addison-Wesley, Reading, MA (1965)
- Lannon, John M., "Technical Writing", Little, Brown and Company, Boston, MA (1979)
- Mazzatenta, Ernest, "Reporting Your Research: A Handbook for the Researcher-Writer", General Motors Research Laboratories, GMR-349, Warren, MI (1980)
- MIL-M-38784A, "Military Specification, Manuals, Technical: General Style and Format Requirements".
- MIL-STD-12C, "Military Standard Abbreviations for use on Drawings, Specifications, Standards, and in Technical Documents".
- MIL-STD-847A, "Format Requirements for Scientific and Technical Reports Prepared by or for the Department of Defense", (1973)
- Sherman, Theodore S. and Johnson, Simon S., "Modern Technical Writing", 3rd Ed, Prentice-Hall, Inc., Englewood Cliffs, NJ, (1975)
- Strunk, William, Jr. and White, E. B., "Elements of Style, The", 3rd Ed, Macmillan Publishing Company, New York, NY, (1979)
- TACOM Suppl 1 to AR 70-31, "Research, Development, and Acquisition Standards for Technical Writing", US Army Tank-Auotmotive Command, Warren, MI (1981)
- Technical Report Format Guide, Battelle Project Management Division, Batelle, Columbus, OH (1982)
- Wallace, John D. and Holding, J. Brewster, "Guide to Writing and Style", Batelle Memorial Institute, Columbus, OH (1966)
- Webster's Seventh New Collegiate Dictionary, G.C. Merriam Company, Springfield, MA

THIS PAGE LEFT BLANK INTENTIONALLY

APPENDIX A

MODEL REPORT

A-1

p. & Wanh

THIS PAGE LEFT INTENTIONALLY BLANK



NO. <u>12657</u>

LIGHT-WEIGHT SADDLE TANK DEVELOPMENT-Phase I-Fabrication and Material Feasibility Technology S VEWS

Contract DAAK30-78-C-0122 July 1982

Hollowform, Inc.
Buckeye International, Inc.
6345 Variel Ave
Woodland Hills, CA 91364
and Dorothy McClendon
U.S. Army Tank-Automotive CMD
DRSTA-RSC
Warren, MI 48090

by

Test and Evaluation Document distribution limited to U.S. Gov't agencies only. Other requests for this document must be referred to USATACOM, ATTN: DRSTA-TS

U.S. ARMY TANK-AUTOMOTIVE COMMAND RESEARCH AND DEVELOPMENT CENTER Warren, Michigan 48090

# NOTICES

This report is not to be construed as an official Department of the Army position.

Mention of any trade names or manufacturers in this report shall not be construed as an official indorsement or approval of such products or companies by the US Government.

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION	PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 12657	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Substite) Light-Weight Saddle Tank Developme Phase I	nt	5. TYPE OF REPORT & PERIOD COVERED Final Technical Report  6. PERFORMING ORG. REPORT NUMBER
. Author(*) Dorothy McClendon TACOM DRSTA-R	sc	8. CONTRACT OR GRANT NUMBER(*) DAAK30-78-C-0122
REPROBING ORGANIZATION NAME AND ADDRESS Hollowform, Inc. Buckeye International, Inc. 6345 Variel Ave		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Wooland Hills CA 91364  1. CONTROLLING OFFICE NAME AND ADDRESS US Army Tank-Automotive Command Warren, Mich 48090, DRSTA-RSC		12. REPORT DATE July 1982 13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(II differen	nt from Controlling Office)	15. SECURITY CLASS. (of this report)  Unclassified  15a, DECLASSIFICATION/DOWNGRADING SCHEDULE

Other request for this document must be referred to USTACOM, ATTN: DRSTA-TS

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, If different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Fuel Tanks, Polyethylene, Cross-linked, Rotationally molded, Fabrication

### 24. ABSTRACT (Continue on reverse side it reserves and identity by block number)

This program was initiated to develop the capabality in manufacturing a fuel tank which will not corrode, be lighter in weight, and last the life of the vehicle. The material to be utilized was high-density polyethylene material.

Fabricated tanks will under go testing at TECOM test sites and assessments will be made.

DD 1 141 73 EDITION OF 1 NOV 65 IS OBSOLETE 1

# TABLE OF CONTENTS

Secti	on	Page
1.0.	INTRODUCTION	5
2.0.	OBJECTIVE	5
3.0.	CONCLUSIONS	5
4.0.	RECOMMENDATIONS	5
5.0.		6
5.1.	Background	6
5.2.	Design	6
5.3.	Material Selection	9
5.4.	Fabrication and Tooling	9
5.5.	Testing	11
ADDE	IDUM	13
LIST	OF REFERENCES	20
DIST	RIBUTION LIST	21

# LIST OF ILLUSTRATIONS

Figur	e				Title	Page
5-1.	Plastic	Fuel	Tank	For	2-12-Ton Truck	7
5-2.	Plastic	Fuel	Tank	For	5-Ton Truck	8

# LIST OF TABLES

Table	Title	Page
5-1.	Physical Properties of Marlex, CL-100	10
5-2.	Drop Impact of a Molded Container	10

#### 1.0. INTRODUCTION

This final Technical Report, prepared by Hollowform, Inc. for the US Army Tank-Automotive Command under Contract DAAK30-78-C-0122, describes Phase One in the development and testing of safe, cost-efficient plastic fuel tanks. Designed to replace the single metal fuel tank on the 2-½-ton truck and the metal saddle tank on the 5-ton truck, these plastic tanks do not corrode or crack in normal wear and significantly reduce the possibility of rupture under stress. In addition, their lighter weight, space-saving designs, and energy-efficient fabrication process make plastic tanks more economical than existing metal tanks.

#### 2.0. OBJECTIVE

The primary goal was to design and fabricate plastic fuel tanks that when tested would prove superior to the metal tanks currently used on  $2-\frac{1}{2}$  and 5-ton trucks.

#### 3.0. CONCLUSIONS

Further improvements in design and in fabrication procedures will allow us to effectively replace metal tanks currently used on  $2-\frac{1}{2}$ -and 5-ton trucks with plastic versions.

#### 4.0. RECOMMENDATIONS

# 4.1. Aluminum Molds

The molds should be made of cast aluminum with shot-peened texture and should incorporate appropriately located, molded-in ribs and corner radii to maintain the tank shape as installed, thereby eliminating negative fuel-weight and side-wall pressure effects.

# 4.2. Sulfonated Tanks

Steps should be taken which will permit us to sulfonate the tanks internally.

# 4.3. Perforated Step-Plate

The incorporation of a perforated step-plate as a part of the tank design on the  $2-\frac{1}{2}$ -ton truck deserves further evaluation so that production costs can be reduced.

# 4.4. Standardized Connections

The feed, supply, return, and vent connections of the  $2-\frac{1}{2}$  and 5-ton tanks

should be standardized. This will permit a common fitting to be used and then appropriately reduced to the required pipe size by way of a "close reducing bushing." This special collar fitting includes a locknut, washer, and gasket and is similar to what is known as a "tank adapter." Cost savings will be achieved, and the seal will be improved.

#### 4.5. Further Recommendations

Recommendations derived from additional field testing should be considered in the final design and fabrication phase.

#### 5.0. DISCUSSION

### 5.1. Background

Metal fuel tanks are currently used on  $2-\frac{1}{2}-$  and 5-ton trucks. The tank on the  $2-\frac{1}{2}-$ ton truck weighs 115 lb and measures  $19-\frac{1}{2}$  in. high, 30 in. long, and 28 in. deep. Each saddle tank on the 5-ton truck weighs  $128-\frac{1}{2}$  lb and measures  $17-\frac{1}{2}$  in. high,  $32-\frac{1}{2}$  in. long, and  $27-\frac{1}{2}$  in. deep. These tanks, however, have distinct disadvantages:

- o Corrosion Metal tanks corrode as a result of environmental conditions (humidity cycling in storage) and fuel degradation (chemical/microbal).
- o Impact resistance Metal tanks frequently rupture at pressures under  ${\tt 4}$  PSIG.
- o Cracking Weld-zone stress in metal tanks occasionally results in cracking.
- o Heat resistance Metal tanks often explode during fires due to high thermal conductivity.
- o Leakage Metal fuel tanks frequently leak at pressures under 4 PSIG.

Such problems can be eliminated or significantly minimized by replacing metal fuel tanks with plastic versions.

#### 5.2. Design

The plastic fuel tanks were generally designed with dimensions identical to those of the current metal tanks so that transition would be easy. However, several minor modifications were made. One of these changes involved securing the plastic tank. First, grooves (as shown in Figures 5-1 and 5-2) were provided for the existing mounting straps. Tank slippage caused by sudden movement was thereby reduced. In addition, to compensate for the difference in strap location on the sides of the chassis. the groove width

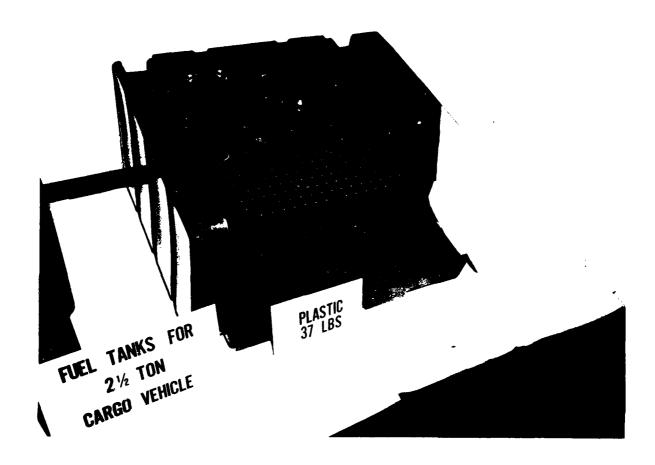


Figure 5-1. Plastic Fuel Tank For  $2\frac{1}{2}$ -Ton Truck (Plastic Version Of P/N RCSK 5701)

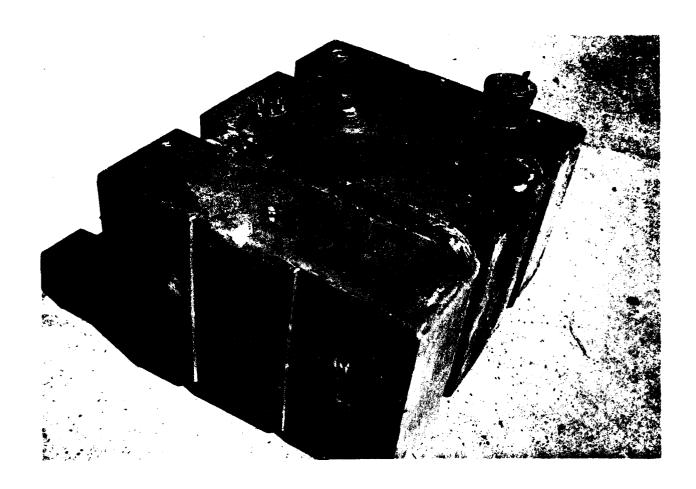


Figure 5-2. Plastic Fuel Tank For 5-Ton Truck (Plastic Version Of P/N 19207-11669354)

was increased. A more significant modification was made in the filler assembly and fill cap designed for the plastic tanks. Because using different hardware on the  $2-\frac{1}{2}$ -and 5-ton tanks is inefficient, a single design was adopted for both plastic tanks. The design chosen was that used on the  $\frac{1}{4}$ -ton truck. Not only did this substitution standardize parts, but it also provided a cap that could be easily removed in all climates. In addition, the component filler-neck assembly was modified to provide a flange for the stud mounting on the plastic tank, and the fitting hardware was designed so that the plastic would only be subjected to compressive loads since it exhibits "cold-flow" characteristics.

Molded-in ribs which parallel the strap grooves are needed to carry weight to the tank side-walls and thereby prevent tank deformation and resultant fuel-gage inaccuracy. This feature was not incorporated because no suitable location for the ribs could be found.

## 5.3. Material Selection

After evaluating numerous types of rotational-mold polyethylene materials and discovering that nylon materials are inclined to be brittle, the customer specified that cross-linked polyethylene be used. The tanks were thus molded using Marlex CL-100, dark green, manufactured by Phillips Petroleum Co. The physical properties and impact resistance of parts fabricated from this material are provided by Phillips Petroleum and delineated in Table 5-1 and Table 5-2 Specifically, Table 5-2 reveals the impact the container can withstand without leaking.

In addition to the benefits gained from such properties, tanks made of Marlex CL-100 offer significant weight savings. At 37 lb, the 55-gal tank designed for the  $2-\frac{1}{2}$ -ton truck weighs 68% less than the existing metal tank while at  $36-\frac{1}{2}$  lb, the 58-gal tank developed for the 5-ton vehicle offers a weight savings of 72%. These weight savings should result in improved fuel economy.

Finally, unlike metal tanks, tanks constructed of cross-linked polyethylene are subject to neither corrosion nor contamination.

# 5.4. Fabrication and Tooling

Currently, two types of molding - blow-molding and rotational molding - are used to produce one-piece hollow vessels such as fuel tanks. Although the shorter molding-cycle-time of the blow-molding process results in lower part costs where high volume is demanded, the rotational molding process was adopted for a number of reasons:

- o The product is totally stress-free.
- o Materials suitable for this process have superior physical properties.

TABLE 5-1. Physical Properties of Marlex CL-100#

Property	ASTM Test	Value
Density of the Cross-Linked Product, gms/cc	D1505-68	0.930-0.933
Enivronmental Stress Cracking Resistance, Condition A, F <sub>50</sub> , hrs	D1693-70	1000
Tensile Strength, Ultimate, PSI 2 in./min	D638-72 Type IV Specimen	2600
Elongation, At Break, % 2 in./min	D638-72 Type IV Specimen	450
Vicat Softening Temperature, <sup>O</sup> F	D1525-70	240
Brittleness Temperature, <sup>O</sup> F	D746-73	-180
Flexural Modulus, PSI	D790-71	100,000

<sup>\*</sup>Based on parts molded  $extbf{@}$  650  $^{ extsf{O}}\text{F}$  for 13 min

TABLE 5-2. Drop Impact of a Molded Container\*

Weight When Filled with Water	Temperature of Water	Drop	Distance
Test 1. 800 gm	73 <sup>°</sup> F	30	ft
Test 2. 800 gm	-20 <sup>o</sup> f	30	ft

<sup>\*</sup>Based on 2-gal container molded @ 600°F for 14 min

- o Tooling cost for small volume production is low.
- o Mold-tooling lead time is relatively short.
- o Wall thickness is uniform.

This process of tank production requires less energy than the process used to produce metal tanks; fabrication is thus less expensive. Due to time constraints, molds were made from fabricated and welded steel instead of cast aluminum. Cast aluminum molds, however, offer distinct advantages. First, using such molds produces greater radius corners and better fillets: these features strengthen the walls of the plastic tank, reducing the possibility of distortion. In addition, use of a cast tool allows shot peening the mold interior: such an interior produces a textured surface on the tanks eliminating the high gloss finish seen on the prototypes. The product finish thus more closely matches the standard military satin Forest Green finish.

Finally, the tanks were treated to reduce fuel permeation. Two methods are normally used: external epoxy coating and internal sulfonation. The external coating method was adopted, for Hollowform is neither licensed nor equipped to sulfonate. Therefore, after flame treating the exteriors of the tanks, they were sprayed with Barafene No. 1003 (Inmount Corp) and oven-cured.

# 5.5. Testing

- 5.5.1. General. The results of the following tests demonstrate the superiority of the plastic tank in impact resistance, heat resistance, and fuel retention. Wyle Laboratories technicians assisted us in pressure and temperature tests.
- 5.5.2. Impact drop test. As a specified test requirement, a tank 3/4-full of water was dropped 20 feet onto concrete, with impact point at a  $45^{\circ}$  angle to axis. The test temperature was  $70^{\circ}$ F. After dropping a tank 25 ft, the tank was pressured to 4 PSIG and checked for leakage using a soap solution. No evidence of leakage appeared.
- 5.5.3. Falling dart test. The requirement was to strike a sample with a  $\frac{1}{4}$ -in.-radius dart of 6 lb; distance and material temperature were not specified. Hollowform's standard test method was thus used: with sample material at  $-20^{\circ}$ F, it was struck with a  $\frac{1}{2}$ -in-radius dart. Having withstood 66 ft-lb of pressure without visible fracture, the sample passed the test.
- 5.5.4. High temperature test. Wyle Laboratories made the following report: The plastic fuel tanks were "placed on 3" /sic/ x 4" /sic/ rails in the chamber and filled to their filler necks with customer-supplied diesel fuel. The fuel tanks were then subjected to the 7 day exposure at  $+130^{\circ}$ F.

The fuel tanks completed the 7 day exposure with no signs of leakage or capillary weeping around any insert filling."(1) (See, pp.12-17 in Addendum for complete report.)

5.5.5. Leakage test (F.2.2). All finished tanks were tested at 4 PSIG and found to be acceptable. (See Addendum.)

## ADDENDUM

#### **WYLE LABORATORIES**

12 April 1979

Hollowform, Inc. 6345 Variel Avenue Woodland Hills, CA 91364

ATTENTION: High Temperature TEST TITLE:

Mr. Roy Newton

REFERENCES: Your Purchase Order No.

02153

Wyle Laboratories Job No. 55404

Government Contract No. DAAK30-78-C-0122

#### Gentiemen:

This is to certify that the enclosed Test Data Sheets contain true and correct data obtained in the performance of the test program as set forth in your purchase order.

Where applicable, instrumentation used in obtaining this data has been calibrated using standards which are traceable to the National Bureau of Standards.

#### Test Results:

Two Plastic Fuel Tanks, one each of Part Numbers RLSK-5701 and 19207-11669354, were submitted for a 7 day Temperature Test at +130°F. The Fuel Tanks were placed on 2" x 4" rails in the chamber and filled to their filler necks with customer supplied diesel fuel. The Fuel Tanks were then subjected to the 7 day exposure at +130°F. The Fuel Tanks completed the 7 day exposure with no signs of leakage or capillary weeping around any insert fittings. The test conditions attained are presented in the enclosed Data Sheet which includes a typical 24 hour temperature recording and the test equipment used. At the conclusion of the test, the Fuel Tanks were returned to Hollowform while still filled with diesel fuel.

Enclosures: Data Sheets ( 3 Pages)

STATE OF CA	LIFORNIA LOS ANGELLS } 85.	
deposes and se	Yiakas Department Manager, be 195. That the information contained in this report serifully conducted tests and is to the best of his all respects.	is the result of
SUBSCRIBED	and sworn to before of this 18 day of April	1 .19 79
	OFFICIAL SEAL	
	William H. Vanderberg, Jr.  NOTARY PUBLIC - CALIFORNIA	14
W-781	LOS ANGELES COUNTY	A-18
	My Commission Expires July 27, 1982	

Mechanical Systems DEPARTMENT \_\_ **TEST ENGINEER** TEST WITNESS . Not Applicable DCAS-QAR VERIFICATION

HOLLOWFORM, INC. 6345 VARIEL AVE. WOODLAND HILLS, CALIF. 91364 PART TITLE: 5 Ton Army Tan

PART NUMBER: 19207-11669354

CONTRACT NUMBER: DAAK30-78-C-01

# PRESSURE TEST

Serial No.	P.S.I.G.	Time Pressured	Results	Test Date	Performed Bv
9-106-01	4	_2min_	_AOK	_27_April_79	LWB/HK
9-081-01	4	2min.	_AOK	11	
9-086-01	4	2min.	AOK	11	11
9-106-02	4	2min.	AOK	11	11
		*****			
		<del></del>	<del></del>		-
		<del></del>			
		`			
					<del></del>
<del></del>	<del></del>				
		***************************************			***************************************
	•				
			·····		

Testing Witnessed by: Harry Kesler Van Nuys DCAS Rep.

Swit

HOLLOWFORM, INC. 6345 VARIEL AVE. WOODLAND HILLS, CALIF. 91364 PART TITLE: 5 Ion Army Tank

PART NUMBER: 19207-11669354

CONTRACT NUMBER: DAAK30-78-C-0122

# HYDROSTATIC PRESSURE TEST

Serial No.	P.S.I.G.	Time Pressured	Results	Test Date	Performed Bv
9-080-01	4	2min.	H20K	11 April 79	LWB/DM <sup>C</sup>
9-080-02	4	2min.	H20K	11	16
9-079-02	4	2min.	H <sub>2</sub> 0K	11	+1
9-079-01	4	2min.	H <sub>2</sub> 0K	11	11
	-	•			<del></del>
`	· <del>· · · · · · · · · · · · · · · · · · </del>				····
-				****	
	<del>4 : </del>				·
	<del></del>	<del></del>			<del></del>
<del></del>	***************************************	·	<del></del>		
		<del></del>			
	•	<del></del>			
	•	<del></del>			-
		****			***************************************

Weight of completed part: 36.5 pounds

Testing Witnessed by: Dorathy M<sup>C</sup>Clendon U.S. Army Rep.

Warren, Michigan



HOLLOWFORM, INC. 6345 VARIEL AVE. WOODLAND HILLS, CALIF. 91364 PART TITLE: 2岁 Ton Army Tank

PART NUMBER: RCK5701

CONTRACT NUMBER: DAAK30-78-C-0122

# HYDROSTATIC PRESSURE TEST


Serial No.	P.S.I.G.	Time Pressured	Results	Test Date	Performed Bv
9-086-02	4	2min	H20K	11 April 79	LWB/DMC
9-085-04	4	2min.	H20K	12 April 79	11
9-086-03	4	_2min.	H <sub>2</sub> OK	II	11
9-086-01	4	2min.	H20K	H	11
	•			<del></del>	<u></u>
		•	<del></del>		
	<del></del>		-	-	<del></del>
<u> </u>					
			<del></del>	·	
	•				
		<del></del>	<del></del>		
		<del></del>	<del> </del>	<del></del>	
	<u> </u>		-	-	<del></del>


Weight of completed part: 37 pounds

Testing Witnessed by: Dorathy  $M^{C}$ Clendon U.S. Army Rep.

Warren, Michigan



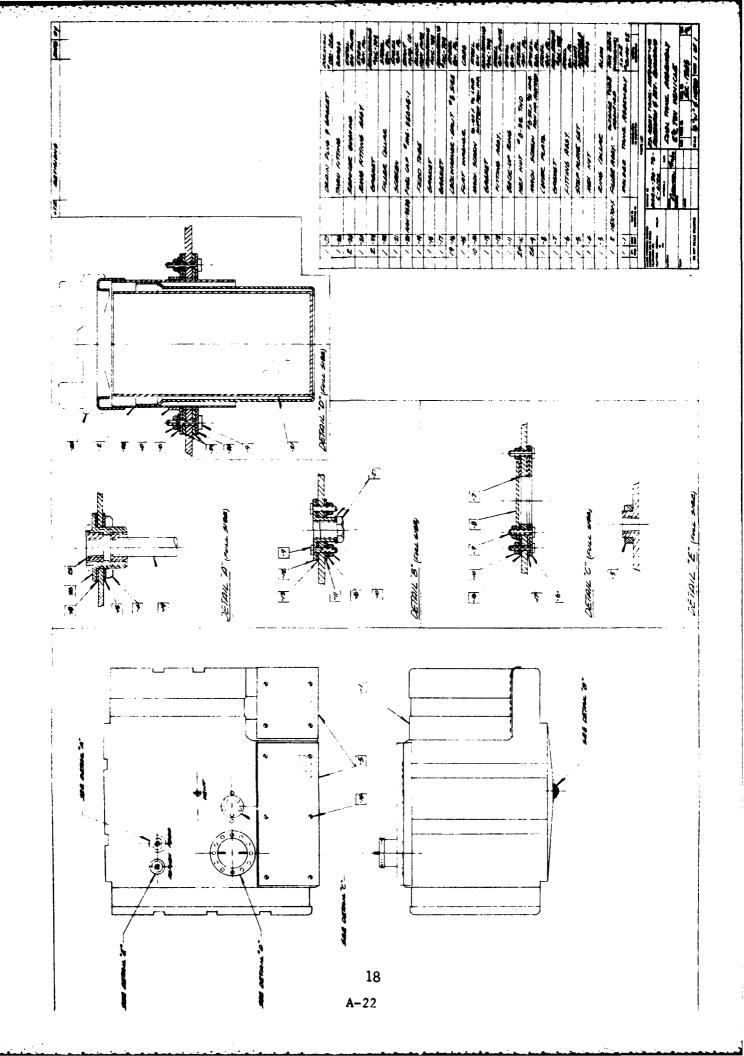

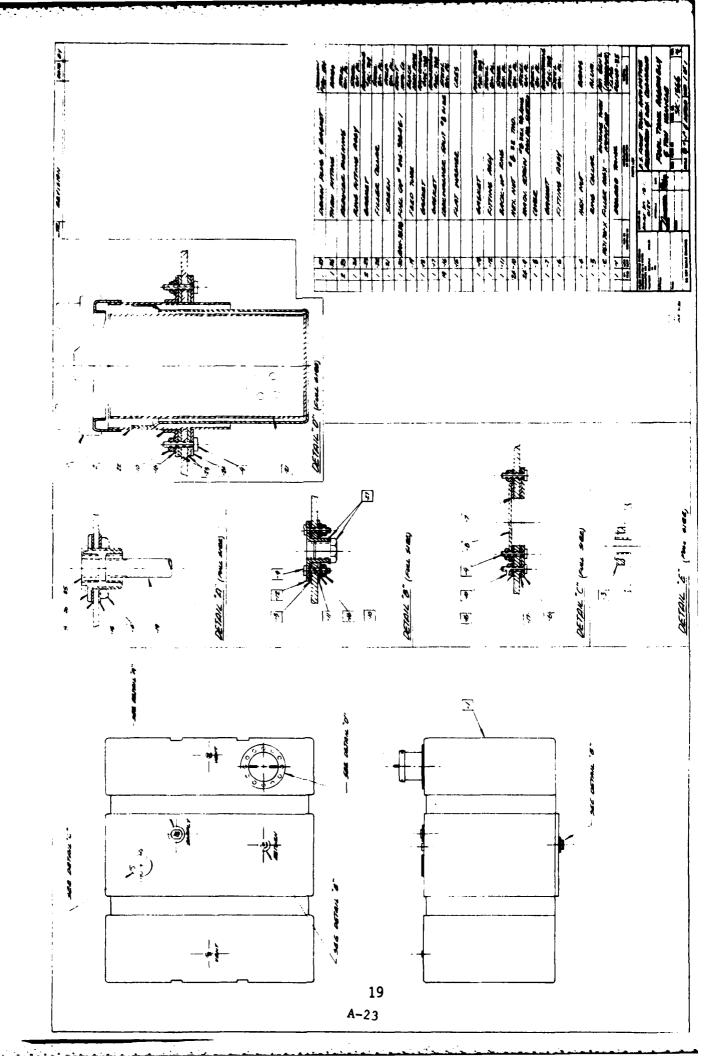

### LIST OF REFERENCES

(1) Yiakas, C.D. <u>Data Sheet Report No. 55404</u>, 12 April 1975, Wyle Laboratories, 128 Maryland St., El Segundo, CA, 90245.

## DISTRIBUTION LIST

Commander		
US Army Tank-Automotive Command		
Warren, Michigan 48090		
ATTN: Dir of Tk-Autmy Sys Lab	DRSTA-R DRSTA-RC DRSTA-RT DRSTA-RS DRSTA-T	1
Combat Systems Division		1 1 20 3
Tactical Wheeled Vehicle Division		
Tactical Systems Support Division		
Dir of Engineering Support		
Tech L1b Br	DRSTA-TSL	2
Commander		
Defense Technical Information Center		
Cameron Station		
5010 Duke STreet		
Alexandria, VA 22314		12
Director		
US Army Industrial Base Engr Activity		
ATTN: DRXIB-MT		
Book Taland II 61201		40

### APPENDIX B

GUIDELINES FOR WRITING

TECHNICAL DEFINITIONS

h it islank

THIS PAGE LEFT INTENTIONALLY BLANK

B-1.0. DEFINING THROUGH SIMPLE CLASSIFICATION AND DIFFERENTIATION AND THROUGH ETYMOLOGY

The writer should begin by stating the word to be defined (Holography is classifying it, and then differentiating it from other items in the same class. If it is an unusual word, be also may want to give its etymology, that is, to provide in formation about the literal meanings of its parts [prefix(es), root(s), and suffix(es)]. He might, for example, consider this definition of chromatography (the quoted material is from Webster's Seventh New Collegiate Dictionary.): Chromatography, which literally means color writing, is "the separation of closely related compounds by allowing their passage through an absorbent material so that each is absorbed in a different colored, layer."(4). Or he might study the definition of isothermal compression offered by the authors of Modern Technical Writing: Isothermal compression is the compression of a gas under such conditions that the heat generated by compression is removed as fast as it is generated, so that the temperature of the gas does not change. The meaning may be seen in that iso is a combining form meaning equal and that thermal refers to heat. (3) Avoid "is when" or "is where" structures after the term.

#### B-2.0. DEFINING BY SUBDIVIDING

If the word can be broken into several major classes or subdivisions, the writer should designate these classes and distinguish among them. For example, he might write the following: "There are essentially two methods of molding cross-linked polyethylene--blow molding and rotational molding. Blow molding is \_\_\_\_\_.

#### B-3.0. DEFINING THROUGH EXAMPLES

If possible, a writer should give three or four examples of applications or products of a process. He should try to use examples that a reader might be familiar with.

#### B-4.0. DEFINING THROUGH RELATED TERMS

If the term can be easily confused with another term (either of broader or more specific meaning), the writer should distinguish among the terms.

#### B-5.0. DEFINING A PROCESS

If the writer is defining a process rather than giving a technical description of a process, he will want to indicate, as the authors of Modern Technical Writing suggest, "why, where, when, and by whom the process is performed" as well as what special instruments or skills are needed for its effective performance. Often a technical definition precedes the more detailed technical description of an object or process.

#### B-6.0. DEFINING AN OBJECT

If a writer is defining an object, he might want to indicate its purpose, its main parts, its distinguishing attributes, and its uses. He could also include information about its origin, i.e., its invention or discovery. Appropriate figures—be they photographs, diagrams, or drawings—are also helpful as supplements to the text.

### APPENDIX C

GUIDELINES FOR WRITING
TECHNICAL DESCRIPTIONS OF OBJECTS

Conk

THIS PAGE LEFT INTENTIONALLY BLANK

#### C-1.0. DEFINITION IN DESCRIPTION

A technical description frequently begins with a simple definition of the object to be described in detail. The simple definition not only classifies and differentiates (see B-1.0.), but it also explains the overall physical features of the object--its size, shape, weight, composition, etc.

#### C.2.O. ORGANIZATION OF DESCRIPTION

- C.2.1. General. The organization of the description is based on a listing of parts; however, the order in which the parts are discussed can vary. One of the following methods of organization can be used or they can be used in combination.
- C.2.2. Organization Based on Visual Survey. The organization of a description is occasionally based on visual survey, that is in the manner in which one looks at the parts of an object. Generally, these principles of visual perception apply: objects which are primarily horizontal in design are viewed from left to right while objects which are primarily vertical design are viewed from top to bottom. One might also visually survey an object in a clockwise fashion or one might first survey the exterior and then survey all or part of the interior. As one seeks to show relationships among parts, one should use directional phrases such as to the right, directly below, and in the upper right hand corner. Further, as a general rule, once one establishes a direction of movement, he should hold to it. Finally, in describing individual parts, it is helpful to provide any details of size, shape, composition, etc., which will help the reader visualize the object. For example, one might use letters to describe shape as in L-shaped, S-shaped, etc. For the most part, simple objects can be surveyed by a single-diretional visual survey; more complex equipment may involve a change in directional movement or a combination of several separate moves. As a general rule however, visual survey should never move from right to left, from bottom to top, in a counter clockwise fashion, or from detail to overview.
- C.2.3. Organization Based on the Order in which the Parts Perform Their Functions. The organization of technical description is most frequently based on order in which the parts perform their functions. This method is, of course, most appropriate when functions occur in sequence. If several parts function simultaneously to produce a single result in a single system, the writer should seek to clarify their relationship. If they function simultaneously as parts of different systems, he will only confuse the reader by noting their simultaneous movement. The governing principle here is logical sequence and interrelationship.

## DISTRIBUTION LIST

- Our ditor:				
JS Army Tank-Automotive Command				
ATTN: DRSTA-TSL				
Warren, MI 48090	2			
Commander				
Defense Technical Information Center				
Cameron Station				
5010 Duke Street				
Alexandria, VA 22314	12			

6-03